

1. Our notation is as follows: $x_1 = 0$ and $y_1 = 0$ are the coordinates of the $m_1 = 3.0$ kg particle; $x_2 = 2.0$ m and $y_2 = 1.0$ m are the coordinates of the $m_2 = 4.0$ kg particle; and, $x_3 = 1.0$ m and $y_3 = 2.0$ m are the coordinates of the $m_3 = 8.0$ kg particle.

(a) The x coordinate of the center of mass is

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2 + m_3 x_3}{m_1 + m_2 + m_3} = \frac{0 + (4.0 \text{ kg})(2.0 \text{ m}) + (8.0 \text{ kg})(1.0 \text{ m})}{3.0 \text{ kg} + 4.0 \text{ kg} + 8.0 \text{ kg}} = 1.1 \text{ m}.$$

(b) The y coordinate of the center of mass is

$$y_{\text{com}} = \frac{m_1 y_1 + m_2 y_2 + m_3 y_3}{m_1 + m_2 + m_3} = \frac{0 + (4.0 \text{ kg})(1.0 \text{ m}) + (8.0 \text{ kg})(2.0 \text{ m})}{3.0 \text{ kg} + 4.0 \text{ kg} + 8.0 \text{ kg}} = 1.3 \text{ m}.$$

(c) As the mass of m_3 , the topmost particle, is increased, the center of mass shifts toward that particle. As we approach the limit where m_3 is infinitely more massive than the others, the center of mass becomes infinitesimally close to the position of m_3 .

2. We use Eq. 9-5 (with SI units understood).

(a) The x coordinates of the system's center of mass is:

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2 + m_3 x_3}{m_1 + m_2 + m_3} = \frac{(2.00)(-1.20) + (4.00)(0.600) + (3.00) x_3}{2.00 + 4.00 + 3.00} = -0.500$$

Solving the equation yields $x_3 = -1.50$ m.

(b) The y coordinates of the system's center of mass is:

$$y_{\text{com}} = \frac{m_1 y_1 + m_2 y_2 + m_3 y_3}{m_1 + m_2 + m_3} = \frac{(2.00)(0.500) + (4.00)(-0.750) + (3.00) y_3}{2.00 + 4.00 + 3.00} = -0.700 .$$

Solving the equation yields $y_3 = -1.43$ m.

3. We will refer to the arrangement as a “table.” We locate the coordinate origin at the left end of the tabletop (as shown in Fig. 9-37). With $+x$ rightward and $+y$ upward, then the center of mass of the right leg is at $(x,y) = (+L, -L/2)$, the center of mass of the left leg is at $(x,y) = (0, -L/2)$, and the center of mass of the tabletop is at $(x,y) = (L/2, 0)$.

(a) The x coordinate of the (whole table) center of mass is

$$x_{\text{com}} = \frac{M(+L) + M(0) + 3M(+L/2)}{M + M + 3M} = 0.5L.$$

With $L = 22$ cm, we have $x_{\text{com}} = 11$ cm.

(b) The y coordinate of the (whole table) center of mass is

$$y_{\text{com}} = \frac{M(-L/2) + M(-L/2) + 3M(0)}{M + M + 3M} = -\frac{L}{5},$$

or $y_{\text{com}} = -4.4$ cm.

From the coordinates, we see that the whole table center of mass is a small distance 4.4 cm directly below the middle of the tabletop.

4. Since the plate is uniform, we can split it up into three rectangular pieces, with the mass of each piece being proportional to its area and its center of mass being at its geometric center. We'll refer to the large $35\text{ cm} \times 10\text{ cm}$ piece (shown to the left of the y axis in Fig. 9-38) as section 1; it has 63.6% of the total area and its center of mass is at $(x_1, y_1) = (-5.0\text{ cm}, -2.5\text{ cm})$. The top $20\text{ cm} \times 5\text{ cm}$ piece (section 2, in the first quadrant) has 18.2% of the total area; its center of mass is at $(x_2, y_2) = (10\text{ cm}, 12.5\text{ cm})$. The bottom $10\text{ cm} \times 10\text{ cm}$ piece (section 3) also has 18.2% of the total area; its center of mass is at $(x_3, y_3) = (5\text{ cm}, -15\text{ cm})$.

(a) The x coordinate of the center of mass for the plate is

$$x_{\text{com}} = (0.636)x_1 + (0.182)x_2 + (0.182)x_3 = -0.45\text{ cm} .$$

(b) The y coordinate of the center of mass for the plate is

$$y_{\text{com}} = (0.636)y_1 + (0.182)y_2 + (0.182)y_3 = -2.0\text{ cm} .$$

5. (a) By symmetry the center of mass is located on the axis of symmetry of the molecule – the y axis. Therefore $x_{\text{com}} = 0$.

(b) To find y_{com} , we note that $3m_{\text{H}}y_{\text{com}} = m_{\text{N}}(y_{\text{N}} - y_{\text{com}})$, where y_{N} is the distance from the nitrogen atom to the plane containing the three hydrogen atoms:

$$y_{\text{N}} = \sqrt{(10.14 \times 10^{-11} \text{ m})^2 - (9.4 \times 10^{-11} \text{ m})^2} = 3.803 \times 10^{-11} \text{ m}.$$

Thus,

$$y_{\text{com}} = \frac{m_{\text{N}}y_{\text{N}}}{m_{\text{N}} + 3m_{\text{H}}} = \frac{(14.0067)(3.803 \times 10^{-11} \text{ m})}{14.0067 + 3(1.00797)} = 3.13 \times 10^{-11} \text{ m}$$

where Appendix F has been used to find the masses.

6. We use Eq. 9-5 to locate the coordinates.

(a) By symmetry $x_{\text{com}} = -d_1/2 = -13 \text{ cm}/2 = -6.5 \text{ cm}$. The negative value is due to our choice of the origin.

(b) We find y_{com} as

$$\begin{aligned} y_{\text{com}} &= \frac{m_i y_{\text{com},i} + m_a y_{\text{com},a}}{m_i + m_a} = \frac{\rho_i V_i y_{\text{com},i} + \rho_a V_a y_{\text{com},a}}{\rho_i V_i + \rho_a V_a} \\ &= \frac{(11 \text{ cm}/2)(7.85 \text{ g/cm}^3) + 3(11 \text{ cm}/2)(2.7 \text{ g/cm}^3)}{7.85 \text{ g/cm}^3 + 2.7 \text{ g/cm}^3} = 8.3 \text{ cm}. \end{aligned}$$

(c) Again by symmetry, we have $z_{\text{com}} = 2.8 \text{ cm}/2 = 1.4 \text{ cm}$.

7. The centers of mass (with centimeters understood) for each of the five sides are as follows:

$(x_1, y_1, z_1) = (0, 20, 20)$	for the side in the yz plane
$(x_2, y_2, z_2) = (20, 0, 20)$	for the side in the xz plane
$(x_3, y_3, z_3) = (20, 20, 0)$	for the side in the xy plane
$(x_4, y_4, z_4) = (40, 20, 20)$	for the remaining side parallel to side 1
$(x_5, y_5, z_5) = (20, 40, 20)$	for the remaining side parallel to side 2

Recognizing that all sides have the same mass m , we plug these into Eq. 9-5 to obtain the results (the first two being expected based on the symmetry of the problem).

(a) The x coordinate of the center of mass is

$$x_{\text{com}} = \frac{mx_1 + mx_2 + mx_3 + mx_4 + mx_5}{5m} = \frac{0 + 20 + 20 + 40 + 20}{5} = 20 \text{ cm}$$

(b) The y coordinate of the center of mass is

$$y_{\text{com}} = \frac{my_1 + my_2 + my_3 + my_4 + my_5}{5m} = \frac{20 + 0 + 20 + 20 + 40}{5} = 20 \text{ cm}$$

(c) The z coordinate of the center of mass is

$$z_{\text{com}} = \frac{mz_1 + mz_2 + mz_3 + mz_4 + mz_5}{5m} = \frac{20 + 20 + 0 + 20 + 20}{5} = 16 \text{ cm}$$

8. (a) Since the can is uniform, its center of mass is at its geometrical center, a distance $H/2$ above its base. The center of mass of the soda alone is at its geometrical center, a distance $x/2$ above the base of the can. When the can is full this is $H/2$. Thus the center of mass of the can and the soda it contains is a distance

$$h = \frac{M(H/2) + m(H/2)}{M + m} = \frac{H}{2}$$

above the base, on the cylinder axis. With $H = 12$ cm, we obtain $h = 6.0$ cm.

(b) We now consider the can alone. The center of mass is $H/2 = 6.0$ cm above the base, on the cylinder axis.

(c) As x decreases the center of mass of the soda in the can at first drops, then rises to $H/2 = 6.0$ cm again.

(d) When the top surface of the soda is a distance x above the base of the can, the mass of the soda in the can is $m_p = m(x/H)$, where m is the mass when the can is full ($x = H$). The center of mass of the soda alone is a distance $x/2$ above the base of the can. Hence

$$h = \frac{M(H/2) + m_p(x/2)}{M + m_p} = \frac{M(H/2) + m(x/H)(x/2)}{M + (mx/H)} = \frac{MH^2 + mx^2}{2(MH + mx)}.$$

We find the lowest position of the center of mass of the can and soda by setting the derivative of h with respect to x equal to 0 and solving for x . The derivative is

$$\frac{dh}{dx} = \frac{2mx}{2(MH + mx)} - \frac{(MH^2 + mx^2)m}{2(MH + mx)^2} = \frac{m^2x^2 + 2MmHx - MmH^2}{2(MH + mx)^2}.$$

The solution to $m^2x^2 + 2MmHx - MmH^2 = 0$ is

$$x = \frac{MH}{m} \left(-1 + \sqrt{1 + \frac{m}{M}} \right).$$

The positive root is used since x must be positive. Next, we substitute the expression found for x into $h = (MH^2 + mx^2)/2(MH + mx)$. After some algebraic manipulation we obtain

$$\begin{aligned}
 h &= \frac{HM}{m} \left(\sqrt{1 + \frac{m}{M}} - 1 \right) \\
 &= \frac{(12 \text{ cm})(0.14 \text{ kg})}{1.31 \text{ kg}} \left(\sqrt{1 + \frac{1.31}{0.14}} - 1 \right) = 2.8 \text{ cm}.
 \end{aligned}$$

9. We use the constant-acceleration equations of Table 2-1 (with +y downward and the origin at the release point), Eq. 9-5 for y_{com} and Eq. 9-17 for \vec{v}_{com} .

(a) The location of the first stone (of mass m_1) at $t = 300 \times 10^{-3}$ s is

$$y_1 = (1/2)gt^2 = (1/2)(9.8)(300 \times 10^{-3})^2 = 0.44 \text{ m},$$

and the location of the second stone (of mass $m_2 = 2m_1$) at $t = 300 \times 10^{-3}$ s is

$$y_2 = (1/2)gt^2 = (1/2)(9.8)(300 \times 10^{-3} - 100 \times 10^{-3})^2 = 0.20 \text{ m}.$$

Thus, the center of mass is at

$$y_{\text{com}} = \frac{m_1 y_1 + m_2 y_2}{m_1 + m_2} = \frac{m_1(0.44 \text{ m}) + 2m_1(0.20 \text{ m})}{m_1 + 2m_2} = 0.28 \text{ m}.$$

(b) The speed of the first stone at time t is $v_1 = gt$, while that of the second stone is

$$v_2 = g(t - 100 \times 10^{-3} \text{ s}).$$

Thus, the center-of-mass speed at $t = 300 \times 10^{-3}$ s is

$$\begin{aligned} v_{\text{com}} &= \frac{m_1 v_1 + m_2 v_2}{m_1 + m_2} = \frac{m_1(9.8)(300 \times 10^{-3}) + 2m_1(9.8)(300 \times 10^{-3} - 100 \times 10^{-3})}{m_1 + 2m_1} \\ &= 2.3 \text{ m/s}. \end{aligned}$$

10. Since the center of mass of the two-skater system does not move, both skaters will end up at the center of mass of the system. Let the center of mass be a distance x from the 40-kg skater, then

$$(65 \text{ kg})(10 \text{ m} - x) = (40 \text{ kg})x \Rightarrow x = 6.2 \text{ m}.$$

Thus the 40-kg skater will move by 6.2 m.

11. We use the constant-acceleration equations of Table 2-1 (with the origin at the traffic light), Eq. 9-5 for x_{com} and Eq. 9-17 for \vec{v}_{com} . At $t = 3.0$ s, the location of the automobile (of mass m_1) is $x_1 = \frac{1}{2}at^2 = \frac{1}{2}(4.0 \text{ m/s}^2)(3.0 \text{ s})^2 = 18 \text{ m}$, while that of the truck (of mass m_2) is $x_2 = vt = (8.0 \text{ m/s})(3.0 \text{ s}) = 24 \text{ m}$. The speed of the automobile then is $v_1 = at = (4.0 \text{ m/s}^2)(3.0 \text{ s}) = 12 \text{ m/s}$, while the speed of the truck remains $v_2 = 8.0 \text{ m/s}$.

(a) The location of their center of mass is

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{(1000 \text{ kg})(18 \text{ m}) + (2000 \text{ kg})(24 \text{ m})}{1000 \text{ kg} + 2000 \text{ kg}} = 22 \text{ m}.$$

(b) The speed of the center of mass is

$$v_{\text{com}} = \frac{m_1 v_1 + m_2 v_2}{m_1 + m_2} = \frac{(1000 \text{ kg})(12 \text{ m/s}) + (2000 \text{ kg})(8.0 \text{ m/s})}{1000 \text{ kg} + 2000 \text{ kg}} = 9.3 \text{ m/s}.$$

12. The implication in the problem regarding \vec{v}_0 is that the olive and the nut start at rest. Although we could proceed by analyzing the forces on each object, we prefer to approach this using Eq. 9-14. The total force on the nut-olive system is $\vec{F}_o + \vec{F}_n = -\hat{i} + \hat{j}$ with the unit Newton understood. Thus, Eq. 9-14 becomes

$$-\hat{i} + \hat{j} = M\vec{a}_{\text{com}}$$

where $M = 2.0$ kg. Thus, $\vec{a}_{\text{com}} = -\frac{1}{2}\hat{i} + \frac{1}{2}\hat{j}$ in SI units. Each component is constant, so we apply the equations discussed in Chapters 2 and 4.

$$\Delta\vec{r}_{\text{com}} = \frac{1}{2}\vec{a}_{\text{com}}t^2 = -4.0\hat{i} + 4.0\hat{j}$$

(in meters) when $t = 4.0$ s. It is perhaps instructive to work through this problem the *long way* (separate analysis for the olive and the nut and then application of Eq. 9-5) since it helps to point out the computational advantage of Eq. 9-14.

13. (a) The net force on the *system* (of total mass $m_1 + m_2$) is m_2g . Thus, Newton's second law leads to $a = g(m_2/(m_1 + m_2)) = 0.4g$. For block1, this acceleration is to the right (the \hat{i} direction), and for block 2 this is an acceleration downward (the $-\hat{j}$ direction). Therefore, Eq. 9-18 gives

$$\vec{a}_{\text{com}} = \frac{m_1 \vec{a}_1 + m_2 \vec{a}_2}{m_1 + m_2} = \frac{(0.6)(0.4g\hat{i}) + (0.4)(-0.4g\hat{j})}{0.6 + 0.4} = (2.35 \hat{i} - 1.57 \hat{j}) \text{ m/s}^2.$$

(b) Integrating Eq. 4-16, we obtain

$$\vec{v}_{\text{com}} = (2.35 \hat{i} - 1.57 \hat{j}) t$$

(with SI units understood), since it started at rest. We note that the *ratio* of the y -component to the x -component (for the velocity vector) does not change with time, and it is that ratio which determines the angle of the velocity vector (by Eq. 3-6), and thus the direction of motion for the center of mass of the system.

(c) The last sentence of our answer for part (b) implies that the path of the center-of-mass is a straight line.

(d) Eq. 3-6 leads to $\theta = -34^\circ$. The path of the center of mass is therefore straight, at downward angle 34° .

14. (a) The phrase (in the problem statement) “such that it [particle 2] always stays directly above particle 1 during the flight” means that the shadow (as if a light were directly above the particles shining down on them) of particle 2 coincides with the position of particle 1, at each moment. We say, in this case, that they are vertically aligned. Because of that alignment, $v_{2x} = v_1 = 10.0$ m/s. Because the initial value of v_2 is given as 20.0 m/s, then (using the Pythagorean theorem) we must have

$$v_{2y} = \sqrt{v_2^2 - v_{2x}^2} = \sqrt{300} \text{ m/s}$$

for the initial value of the y component of particle 2’s velocity. Eq. 2-16 (or conservation of energy) readily yields $y_{\max} = 300/19.6 = 15.3$ m. Thus, we obtain

$$H_{\max} = m_2 y_{\max} / m_{\text{total}} = (3.00)(15.3)/8.00 = 5.74 \text{ m.}$$

(b) Since both particles have the same horizontal velocity, and particle 2’s vertical component of velocity vanishes at that highest point, then the center of mass velocity then is simply $(10.0 \text{ m/s})\hat{i}$ (as one can verify using Eq. 9-17).

(c) Only particle 2 experiences any acceleration (the free fall acceleration downward), so Eq. 9-18 (or Eq. 9-19) leads to

$$a_{\text{com}} = m_2 g / m_{\text{total}} = (3.00)(9.8)/8.00 = 3.68 \text{ m/s}^2$$

for the magnitude of the downward acceleration of the center of mass of this system. Thus, $\vec{a}_{\text{com}} = (-3.68 \text{ m/s}^2)\hat{j}$.

15. We need to find the coordinates of the point where the shell explodes and the velocity of the fragment that does not fall straight down. The coordinate origin is at the firing point, the $+x$ axis is rightward, and the $+y$ direction is upward. The y component of the velocity is given by $v = v_{0y} - gt$ and this is zero at time $t = v_{0y}/g = (v_0/g) \sin \theta_0$, where v_0 is the initial speed and θ_0 is the firing angle. The coordinates of the highest point on the trajectory are

$$x = v_{0x}t = v_0t \cos \theta_0 = \frac{v_0^2}{g} \sin \theta_0 \cos \theta_0 = \frac{(20 \text{ m/s})^2}{9.8 \text{ m/s}^2} \sin 60^\circ \cos 60^\circ = 17.7 \text{ m}$$

and

$$y = v_{0y}t - \frac{1}{2}gt^2 = \frac{1}{2} \frac{v_0^2}{g} \sin^2 \theta_0 = \frac{1}{2} \frac{(20 \text{ m/s})^2}{9.8 \text{ m/s}^2} \sin^2 60^\circ = 15.3 \text{ m}.$$

Since no horizontal forces act, the horizontal component of the momentum is conserved. Since one fragment has a velocity of zero after the explosion, the momentum of the other equals the momentum of the shell before the explosion. At the highest point the velocity of the shell is $v_0 \cos \theta_0$, in the positive x direction. Let M be the mass of the shell and let V_0 be the velocity of the fragment. Then $Mv_0 \cos \theta_0 = MV_0/2$, since the mass of the fragment is $M/2$. This means

$$V_0 = 2v_0 \cos \theta_0 = 2(20 \text{ m/s}) \cos 60^\circ = 20 \text{ m/s}.$$

This information is used in the form of initial conditions for a projectile motion problem to determine where the fragment lands. Resetting our clock, we now analyze a projectile launched horizontally at time $t = 0$ with a speed of 20 m/s from a location having coordinates $x_0 = 17.7 \text{ m}$, $y_0 = 15.3 \text{ m}$. Its y coordinate is given by $y = y_0 - \frac{1}{2}gt^2$, and when it lands this is zero. The time of landing is $t = \sqrt{2y_0/g}$ and the x coordinate of the landing point is

$$x = x_0 + V_0t = x_0 + V_0 \sqrt{\frac{2y_0}{g}} = 17.7 \text{ m} + (20 \text{ m/s}) \sqrt{\frac{2(15.3 \text{ m})}{9.8 \text{ m/s}^2}} = 53 \text{ m}.$$

16. We denote the mass of Ricardo as M_R and that of Carmelita as M_C . Let the center of mass of the two-person system (assumed to be closer to Ricardo) be a distance x from the middle of the canoe of length L and mass m . Then $M_R(L/2 - x) = mx + M_C(L/2 + x)$. Now, after they switch positions, the center of the canoe has moved a distance $2x$ from its initial position. Therefore, $x = 40 \text{ cm}/2 = 0.20 \text{ m}$, which we substitute into the above equation to solve for M_C :

$$M_C = \frac{M_R(L/2 - x) - mx}{L/2 + x} = \frac{(80)(\frac{3.0}{2} - 0.20) - (30)(0.20)}{(3.0/2) + 0.20} = 58 \text{ kg}.$$

17. There is no net horizontal force on the dog-boat system, so their center of mass does not move. Therefore by Eq. 9-16, $M\Delta x_{\text{com}} = 0 = m_b\Delta x_b + m_d\Delta x_d$, which implies

$$|\Delta x_b| = \frac{m_d}{m_b} |\Delta x_d|.$$

Now we express the geometrical condition that *relative to the boat* the dog has moved a distance $d = 2.4$ m:

$$|\Delta x_b| + |\Delta x_d| = d$$

which accounts for the fact that the dog moves one way and the boat moves the other. We substitute for $|\Delta x_b|$ from above:

$$\frac{m_d}{m_b} |\Delta x_d| + |\Delta x_d| = d$$

which leads to $|\Delta x_d| = \frac{d}{1 + \frac{m_d}{m_b}} = \frac{2.4}{1 + \frac{4.5}{18}} = 1.92$ m.

The dog is therefore 1.9 m closer to the shore than initially (where it was $D = 6.1$ m from it). Thus, it is now $D - |\Delta x_d| = 4.2$ m from the shore.

18. The magnitude of the ball's momentum change is

$$\Delta p = |mv_i - mv_f| = (0.70 \text{ kg})|5.0 \text{ m/s} - (-2.0 \text{ m/s})| = 4.9 \text{ kg} \cdot \text{m/s}.$$

19. (a) The change in kinetic energy is

$$\begin{aligned}\Delta K &= \frac{1}{2}mv_f^2 - \frac{1}{2}mv_i^2 = \frac{1}{2}(2100 \text{ kg})\left((51 \text{ km/h})^2 - (41 \text{ km/h})^2\right) \\ &= 9.66 \times 10^4 \text{ kg} \cdot (\text{km/h})^2 \left((10^3 \text{ m/km})(1 \text{ h}/3600 \text{ s})\right)^2 \\ &= 7.5 \times 10^4 \text{ J}.\end{aligned}$$

(b) The magnitude of the change in velocity is

$$|\Delta \vec{v}| = \sqrt{(-v_i)^2 + (v_f)^2} = \sqrt{(-41 \text{ km/h})^2 + (51 \text{ km/h})^2} = 65.4 \text{ km/h}$$

so the magnitude of the change in momentum is

$$|\Delta \vec{p}| = m|\Delta \vec{v}| = (2100 \text{ kg})(65.4 \text{ km/h})\left(\frac{1000 \text{ m/km}}{3600 \text{ s/h}}\right) = 3.8 \times 10^4 \text{ kg} \cdot \text{m/s}.$$

(c) The vector $\Delta \vec{p}$ points at an angle θ south of east, where

$$\theta = \tan^{-1}\left(\frac{v_i}{v_f}\right) = \tan^{-1}\left(\frac{41 \text{ km/h}}{51 \text{ km/h}}\right) = 39^\circ.$$

20. (a) Since the force of impact on the ball is in the y direction, p_x is conserved:

$$p_{xi} = mv_i \sin \theta_1 = p_{xf} = mv_i \sin \theta_2.$$

With $\theta_1 = 30.0^\circ$, we find $\theta_2 = 30.0^\circ$.

(b) The momentum change is

$$\begin{aligned}\Delta \vec{p} &= mv_i \cos \theta_2 (-\hat{j}) - mv_i \cos \theta_2 (+\hat{j}) = -2 (0.165 \text{ kg}) (2.00 \text{ m/s}) (\cos 30^\circ) \hat{j} \\ &= (-0.572 \text{ kg} \cdot \text{m/s}) \hat{j}.\end{aligned}$$

21. We infer from the graph that the horizontal component of momentum p_x is $4.0 \text{ kg}\cdot\text{m/s}$. Also, its initial magnitude of momentum p_o is $6.0 \text{ kg}\cdot\text{m/s}$. Thus,

$$\cos \theta_o = \frac{p_x}{p_o} \Rightarrow \theta_o = 48^\circ .$$

22. We use coordinates with $+x$ horizontally toward the pitcher and $+y$ upward. Angles are measured counterclockwise from the $+x$ axis. Mass, velocity and momentum units are SI. Thus, the initial momentum can be written $\vec{p}_0 = (4.5 \angle 215^\circ)$ in magnitude-angle notation.

(a) In magnitude-angle notation, the momentum change is $(6.0 \angle -90^\circ) - (4.5 \angle 215^\circ) = (5.0 \angle -43^\circ)$ (efficiently done with a vector-capable calculator in polar mode). The magnitude of the momentum change is therefore $5.0 \text{ kg} \cdot \text{m/s}$.

(b) The momentum change is $(6.0 \angle 0^\circ) - (4.5 \angle 215^\circ) = (10 \angle 15^\circ)$. Thus, the magnitude of the momentum change is $10 \text{ kg} \cdot \text{m/s}$.

23. The initial direction of motion is in the +x direction. The magnitude of the average force F_{avg} is given by

$$F_{\text{avg}} = \frac{J}{\Delta t} = \frac{32.4 \text{ N}\cdot\text{s}}{2.70 \times 10^{-2} \text{ s}} = 1.20 \times 10^3 \text{ N}$$

The force is in the negative direction. Using the linear momentum-impulse theorem stated in Eq. 9-31, we have

$$-F_{\text{avg}}\Delta t = mv_f - mv_i.$$

where m is the mass, v_i the initial velocity, and v_f the final velocity of the ball. Thus,

$$v_f = \frac{mv_i - F_{\text{avg}}\Delta t}{m} = \frac{(0.40 \text{ kg})(14 \text{ m/s}) - (1200 \text{ N})(27 \times 10^{-3} \text{ s})}{0.40 \text{ kg}} = -67 \text{ m/s}.$$

(a) The final speed of the ball is $|v_f| = 67 \text{ m/s}$.

(b) The negative sign indicates that the velocity is in the $-x$ direction, which is opposite to the initial direction of travel.

(c) From the above, the average magnitude of the force is $F_{\text{avg}} = 1.20 \times 10^3 \text{ N}$.

(d) The direction of the impulse on the ball is $-x$, same as the applied force.

24. We estimate his mass in the neighborhood of 70 kg and compute the upward force F of the water from Newton's second law: $F - mg = ma$, where we have chosen +y upward, so that $a > 0$ (the acceleration is upward since it represents a deceleration of his downward motion through the water). His speed when he arrives at the surface of the water is found either from Eq. 2-16 or from energy conservation: $v = \sqrt{2gh}$, where $h = 12$ m, and since the deceleration a reduces the speed to zero over a distance $d = 0.30$ m we also obtain $v = \sqrt{2ad}$. We use these observations in the following.

Equating our two expressions for v leads to $a = gh/d$. Our force equation, then, leads to

$$F = mg + m\left(g \frac{h}{d}\right) = mg\left(1 + \frac{h}{d}\right)$$

which yields $F \approx 2.8 \times 10^4$ kg. Since we are not at all certain of his mass, we express this as a guessed-at range (in kN) $25 < F < 30$.

Since $F \gg mg$, the impulse \vec{J} due to the net force (while he is in contact with the water) is overwhelmingly caused by the upward force of the water: $\int F dt = \vec{J}$ to a good approximation. Thus, by Eq. 9-29,

$$\int F dt = \vec{p}_f - \vec{p}_i = 0 - m(-\sqrt{2gh})$$

(the minus sign with the initial velocity is due to the fact that downward is the negative direction) which yields (70) $\sqrt{2(9.8)(12)} = 1.1 \times 10^3$ kg·m/s. Expressing this as a range (in kN·s) we estimate

$$1.0 < \int F dt < 1.2.$$

25. We choose +y upward, which implies $a > 0$ (the acceleration is upward since it represents a deceleration of his downward motion through the snow).

(a) The maximum deceleration a_{\max} of the paratrooper (of mass m and initial speed $v = 56$ m/s) is found from Newton's second law

$$F_{\text{snow}} - mg = ma_{\max}$$

where we require $F_{\text{snow}} = 1.2 \times 10^5$ N. Using Eq. 2-15 $v^2 = 2a_{\max}d$, we find the minimum depth of snow for the man to survive:

$$d = \frac{v^2}{2a_{\max}} = \frac{mv^2}{2(F_{\text{snow}} - mg)} \approx \frac{(85\text{kg})(56\text{m/s})^2}{2(1.2 \times 10^5\text{N})} = 1.1\text{ m}.$$

(b) His short trip through the snow involves a change in momentum

$$\Delta \vec{p} = \vec{p}_f - \vec{p}_i = 0 - (85\text{kg})(-56\text{m/s}) = -4.8 \times 10^3\text{ kg} \cdot \text{m/s},$$

or $|\Delta \vec{p}| = 4.8 \times 10^3\text{ kg} \cdot \text{m/s}$. The negative value of the initial velocity is due to the fact that downward is the negative direction. By the impulse-momentum theorem, this equals the impulse due to the net force $F_{\text{snow}} - mg$, but since $F_{\text{snow}} \gg mg$ we can approximate this as the impulse on him just from the snow.

26. We choose +y upward, which means $\vec{v}_i = -25\text{ m/s}$ and $\vec{v}_f = +10\text{ m/s}$. During the collision, we make the reasonable approximation that the net force on the ball is equal to F_{avg} – the average force exerted by the floor up on the ball.

(a) Using the impulse momentum theorem (Eq. 9-31) we find

$$\vec{J} = m\vec{v}_f - m\vec{v}_i = (1.2)(10) - (1.2)(-25) = 42 \text{ kg} \cdot \text{m/s}.$$

(b) From Eq. 9-35, we obtain

$$\vec{F}_{\text{avg}} = \frac{\vec{J}}{\Delta t} = \frac{42}{0.020} = 2.1 \times 10^3 \text{ N}.$$

27. We choose the positive direction in the direction of rebound so that $\vec{v}_f > 0$ and $\vec{v}_i < 0$. Since they have the same speed v , we write this as $\vec{v}_f = v$ and $\vec{v}_i = -v$. Therefore, the change in momentum for each bullet of mass m is $\Delta\vec{p} = m\Delta v = 2mv$. Consequently, the total change in momentum for the 100 bullets (each minute) $\Delta\vec{P} = 100\Delta\vec{p} = 200mv$. The average force is then

$$\vec{F}_{\text{avg}} = \frac{\Delta\vec{P}}{\Delta t} = \frac{(200)(3 \times 10^{-3} \text{ kg})(500 \text{ m/s})}{(1 \text{ min})(60 \text{ s/min})} \approx 5 \text{ N}.$$

28. (a) By the impulse-momentum theorem (Eq. 9-31) the change in momentum must equal the “area” under the $F(t)$ curve. Using the facts that the area of a triangle is $\frac{1}{2}$ (base)(height), and that of a rectangle is (height)(width), we find the momentum at $t = 4$ s to be $(30 \text{ kg}\cdot\text{m/s})\hat{i}$.

(b) Similarly (but keeping in mind that areas beneath the axis are counted negatively) we find the momentum at $t = 7$ s is $(38 \text{ kg}\cdot\text{m/s})\hat{i}$.

(c) At $t = 9$ s, we obtain $\vec{p} = (6.0 \text{ m/s})\hat{i}$.

29. We use coordinates with $+x$ rightward and $+y$ upward, with the usual conventions for measuring the angles (so that the initial angle becomes $180 + 35 = 215^\circ$). Using SI units and magnitude-angle notation (efficient to work with when using a vector-capable calculator), the change in momentum is

$$\vec{J} = \Delta\vec{p} = \vec{p}_f - \vec{p}_i = (3.00\angle 90^\circ) - (3.60\angle 215^\circ) = (5.86\angle 59.8^\circ).$$

(a) The magnitude of the impulse is $J = \Delta p = 5.86 \text{ kg} \cdot \text{m/s}$.

(b) The direction of \vec{J} is 59.8° measured counterclockwise from the $+x$ axis.

(c) Eq. 9-35 leads to

$$J = F_{\text{avg}} \Delta t = 5.86 \Rightarrow F_{\text{avg}} = \frac{5.86}{2.00 \times 10^{-3}} \approx 2.93 \times 10^3 \text{ N}.$$

We note that this force is very much larger than the weight of the ball, which justifies our (implicit) assumption that gravity played no significant role in the collision.

(d) The direction of \vec{F}_{avg} is the same as \vec{J} , 59.8° measured counterclockwise from the $+x$ axis.

30. (a) Choosing upward as the positive direction, the momentum change of the foot is

$$\Delta \vec{p} = 0 - m_{\text{foot}} \vec{v}_i = -(0.003 \text{ kg}) (-1.50 \text{ m/s}) = 4.50 \times 10^{-3} \text{ N} \cdot \text{s}.$$

(b) Using Eq. 9-35 and now treating *downward* as the positive direction, we have

$$\vec{J} = \vec{F}_{\text{avg}} \Delta t = m_{\text{lizard}} g \Delta t = (0.090)(9.80)(0.60) = 0.529 \text{ N} \cdot \text{s}.$$

31. (a) By Eq. 9-30, impulse can be determined from the “area” under the $F(t)$ curve. Keeping in mind that the area of a triangle is $\frac{1}{2}(\text{base})(\text{height})$, we find the impulse in this case is 1.00 N·s.

(b) By definition (of the average of function, in the calculus sense) the average force must be the result of part (a) divided by the time (0.010 s). Thus, the average force is found to be 100 N.

(c) Consider ten hits. Thinking of ten hits as 10 $F(t)$ triangles, our total time interval is $10(0.050 \text{ s}) = 0.50 \text{ s}$, and the total area is $10(1.0 \text{ N·s})$. We thus obtain an average force of $10/0.50 = 20.0 \text{ N}$. One could consider 15 hits, 17 hits, and so on, and still arrive at this same answer.

32. We choose our positive direction in the direction of the rebound (so the ball's initial velocity is negative-valued). We evaluate the integral $J = \int F dt$ by adding the appropriate areas (of a triangle, a rectangle, and another triangle) shown in the graph (but with the t converted to seconds). With $m = 0.058$ kg and $v = 34$ m/s, we apply the impulse-momentum theorem:

$$\begin{aligned} \int F_{\text{wall}} dt = m\vec{v}_f - m\vec{v}_i &\Rightarrow \int_0^{0.002} F dt + \int_{0.002}^{0.004} F dt + \int_{0.004}^{0.006} F dt = m(+v) - m(-v) \\ &\Rightarrow \frac{1}{2} F_{\text{max}} (0.002 \text{ s}) + F_{\text{max}} (0.002 \text{ s}) + \frac{1}{2} F_{\text{max}} (0.002 \text{ s}) = 2mv \end{aligned}$$

which yields $F_{\text{max}} (0.004 \text{ s}) = 2(0.058 \text{ kg})(34 \text{ m/s}) = 9.9 \times 10^2$ N.

33. From Fig. 9-55, +y corresponds to the direction of the rebound (directly away from the wall) and +x towards the right. Using unit-vector notation, the ball's initial and final velocities are

$$\begin{aligned}\vec{v}_i &= v \cos \theta \hat{i} - v \sin \theta \hat{j} = 5.2 \hat{i} - 3.0 \hat{j} \\ \vec{v}_f &= v \cos \theta \hat{i} + v \sin \theta \hat{j} = 5.2 \hat{i} + 3.0 \hat{j}\end{aligned}$$

respectively (with SI units understood).

(a) With $m = 0.30 \text{ kg}$, the impulse-momentum theorem (Eq. 9-31) yields

$$\vec{J} = m\vec{v}_f - m\vec{v}_i = 2(0.30 \text{ kg})(3.0 \text{ m/s } \hat{j}) = (1.8 \text{ N} \cdot \text{s})\hat{j}$$

(b) Using Eq. 9-35, the force on the ball by the wall is $\vec{J}/\Delta t = (1.8/0.010)\hat{j} = (180 \text{ N})\hat{j}$. By Newton's third law, the force on the wall by the ball is $(-180 \text{ N})\hat{j}$ (that is, its magnitude is 180 N and its direction is directly into the wall, or "down" in the view provided by Fig. 9-55).

34. (a) Performing the integral (from time a to time b) indicated in Eq. 9-30, we obtain

$$\int_a^b (12 - 3t^2) dt = 12(b - a) - (b^3 - a^3)$$

in SI units. If $b = 1.25$ s and $a = 0.50$ s, this gives 7.17 N·s.

(b) This integral (the impulse) relates to the change of momentum in Eq. 9-31. We note that the force is zero at $t = 2.00$ s. Evaluating the above expression for $a = 0$ and $b = 2.00$ gives an answer of 16.0 kg·m/s.

35. No external forces with horizontal components act on the man-stone system and the vertical forces sum to zero, so the total momentum of the system is conserved. Since the man and the stone are initially at rest, the total momentum is zero both before and after the stone is kicked. Let m_s be the mass of the stone and v_s be its velocity after it is kicked; let m_m be the mass of the man and v_m be his velocity after he kicks the stone. Then

$$m_s v_s + m_m v_m = 0 \rightarrow v_m = -m_s v_s / m_m.$$

We take the axis to be positive in the direction of motion of the stone. Then

$$v_m = -\frac{(0.068 \text{ kg})(4.0 \text{ m/s})}{91 \text{ kg}} = -3.0 \times 10^{-3} \text{ m/s},$$

or $|v_m| = 3.0 \times 10^{-3} \text{ m/s}$. The negative sign indicates that the man moves in the direction opposite to the direction of motion of the stone.

36. We apply Eq. 9-17, with $M = \sum m = 1.3 \text{ kg}$,

$$\begin{aligned} M\vec{v}_{\text{com}} &= m_A\vec{v}_A + m_B\vec{v}_B + m_C\vec{v}_C \\ (1.3) (-0.40\hat{i}) &= (0.50)\vec{v}_A + (0.60)(0.20\hat{i}) + (0.20)(0.30\hat{i}) \end{aligned}$$

which leads to $\vec{v}_A = -1.4\hat{i}$ in SI units (m/s).

37. Our notation is as follows: the mass of the motor is M ; the mass of the module is m ; the initial speed of the system is v_0 ; the relative speed between the motor and the module is v_r ; and, the speed of the module relative to the Earth is v after the separation. Conservation of linear momentum requires

$$(M + m)v_0 = mv + M(v - v_r).$$

Therefore,

$$v = v_0 + \frac{Mv_r}{M + m} = 4300 \text{ km/h} + \frac{(4m)(82 \text{ km/h})}{4m + m} = 4.4 \times 10^3 \text{ km/h}.$$

38. (a) With SI units understood, the velocity of block L (in the frame of reference indicated in the figure that goes with the problem) is $(v_1 - 3)\hat{i}$. Thus, momentum conservation (for the explosion at $t = 0$) gives

$$m_L(v_1 - 3) + (m_C + m_R)v_1 = 0$$

which leads to

$$v_1 = \frac{3 m_L}{m_L + m_C + m_R} = \frac{3(2 \text{ kg})}{10 \text{ kg}} = 0.60 \text{ m/s}.$$

Next, at $t = 0.80$ s, momentum conservation (for the second explosion) gives

$$m_C v_2 + m_R(v_2 + 3) = (m_C + m_R)v_1 = (8 \text{ kg})(0.60 \text{ m/s}) = 4.8 \text{ kg}\cdot\text{m/s}.$$

This yields $v_2 = -0.15$. Thus, the velocity of block C after the second explosion is

$$v_2 = -(0.15 \text{ m/s})\hat{i}.$$

(b) Between $t = 0$ and $t = 0.80$ s, the block moves $v_1\Delta t = (0.60)(0.80) = 0.48$ m. Between $t = 0.80$ s and $t = 2.80$ s, it moves an additional $v_2\Delta t = (-0.15)(2.00) = -0.30$ m. Its net displacement since $t = 0$ is therefore $0.48 - 0.30 = 0.18$ m.

39. Our +x direction is east and +y direction is north. The linear momenta for the two $m = 2.0$ kg parts are then

$$\vec{p}_1 = m\vec{v}_1 = mv_1 \hat{j}$$

where $v_1 = 3.0$ m/s, and

$$\vec{p}_2 = m\vec{v}_2 = m(v_{2x} \hat{i} + v_{2y} \hat{j}) = mv_2(\cos\theta \hat{i} + \sin\theta \hat{j})$$

where $v_2 = 5.0$ m/s and $\theta = 30^\circ$. The combined linear momentum of both parts is then

$$\begin{aligned}\vec{P} &= \vec{p}_1 + \vec{p}_2 = mv_1 \hat{j} + mv_2(\cos\theta \hat{i} + \sin\theta \hat{j}) = (mv_2 \cos\theta) \hat{i} + (mv_1 + mv_2 \sin\theta) \hat{j} \\ &= (2.0 \text{ kg})(5.0 \text{ m/s})(\cos 30^\circ) \hat{i} + (2.0 \text{ kg})(3.0 \text{ m/s} + (5.0 \text{ m/s})(\sin 30^\circ)) \hat{j} \\ &= (8.66 \hat{i} + 11 \hat{j}) \text{ kg} \cdot \text{m/s}.\end{aligned}$$

From conservation of linear momentum we know that this is also the linear momentum of the whole kit before it splits. Thus the speed of the 4.0-kg kit is

$$v = \frac{P}{M} = \frac{\sqrt{P_x^2 + P_y^2}}{M} = \frac{\sqrt{(8.66 \text{ kg} \cdot \text{m/s})^2 + (11 \text{ kg} \cdot \text{m/s})^2}}{4.0 \text{ kg}} = 3.5 \text{ m/s}.$$

40. Our notation (and, implicitly, our choice of coordinate system) is as follows: the mass of the original body is m ; its initial velocity is $\vec{v}_0 = v \hat{i}$; the mass of the less massive piece is m_1 ; its velocity is $\vec{v}_1 = 0$; and, the mass of the more massive piece is m_2 . We note that the conditions $m_2 = 3m_1$ (specified in the problem) and $m_1 + m_2 = m$ generally assumed in classical physics (before Einstein) lead us to conclude

$$m_1 = \frac{1}{4}m \quad \text{and} \quad m_2 = \frac{3}{4}m.$$

Conservation of linear momentum requires

$$m\vec{v}_0 = m_1\vec{v}_1 + m_2\vec{v}_2 \quad \Rightarrow \quad mv\hat{i} = 0 + \frac{3}{4}m\vec{v}_2$$

which leads to $\vec{v}_2 = \frac{4}{3}v\hat{i}$. The increase in the system's kinetic energy is therefore

$$\Delta K = \frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 - \frac{1}{2}mv_0^2 = 0 + \frac{1}{2}\left(\frac{3}{4}m\right)\left(\frac{4}{3}v\right)^2 - \frac{1}{2}mv^2 = \frac{1}{6}mv^2.$$

41. Our notation (and, implicitly, our choice of coordinate system) is as follows: the mass of one piece is $m_1 = m$; its velocity is $\vec{v}_1 = -30\hat{i}$ in SI units (m/s); the mass of the second piece is $m_2 = m$; its velocity is $\vec{v}_2 = -30\hat{j}$ in SI units; and, the mass of the third piece is $m_3 = 3m$.

(a) Conservation of linear momentum requires

$$m\vec{v}_0 = m_1\vec{v}_1 + m_2\vec{v}_2 + m_3\vec{v}_3 \Rightarrow 0 = m(-30\hat{i}) + m(-30\hat{j}) + 3m\vec{v}_3$$

which leads to $\vec{v}_3 = 10\hat{i} + 10\hat{j}$ in SI units. Its magnitude is $v_3 = 10\sqrt{2} \approx 14 \text{ m/s}$.

(b) The direction is 45° *counterclockwise* from $+x$ (in this system where we have m_1 flying off in the $-x$ direction and m_2 flying off in the $-y$ direction).

42. We can think of the sliding-until-stopping as an example of kinetic energy converting into thermal energy (see Eq. 8-29 and Eq. 6-2, with $F_N = mg$). This leads to $v^2 = 2\mu g d$ being true separately for each piece. Thus we can set up a ratio:

$$\left(\frac{v_L}{v_R}\right)^2 = \frac{2\mu_L g d_L}{2\mu_R g d_R} = \frac{12}{25} .$$

But (by the conservation of momentum) the ratio of speeds must be inversely proportional to the ratio of masses (since the initial momentum – before the explosion – was zero). Consequently,

$$\left(\frac{m_R}{m_L}\right)^2 = \frac{12}{25} \Rightarrow m_R = \frac{2}{5}\sqrt{3} m_L = 1.39 \text{ kg}.$$

Therefore, the total mass is $m_R + m_L \approx 3.4 \text{ kg}$.

43. Our notation is as follows: the mass of the original body is $M = 20.0$ kg; its initial velocity is $\vec{v}_0 = 200\hat{i}$ in SI units (m/s); the mass of one fragment is $m_1 = 10.0$ kg; its velocity is $\vec{v}_1 = -100\hat{j}$ in SI units; the mass of the second fragment is $m_2 = 4.0$ kg; its velocity is $\vec{v}_2 = -500\hat{i}$ in SI units; and, the mass of the third fragment is $m_3 = 6.00$ kg.

(a) Conservation of linear momentum requires $M\vec{v}_0 = m_1\vec{v}_1 + m_2\vec{v}_2 + m_3\vec{v}_3$, which (using the above information) leads to

$$\vec{v}_3 = (1.00 \times 10^3 \hat{i} - 0.167 \times 10^3 \hat{j}) \text{ m/s}$$

in SI units. The magnitude of \vec{v}_3 is $v_3 = \sqrt{1000^2 + (-167)^2} = 1.01 \times 10^3$ m/s. It points at $\tan^{-1}(-167/1000) = -9.48^\circ$ (that is, at 9.5° measured clockwise from the $+x$ axis).

(b) We are asked to calculate ΔK or

$$\left(\frac{1}{2} m_1 v_1^2 + \frac{1}{2} m_2 v_2^2 + \frac{1}{2} m_3 v_3^2 \right) - \frac{1}{2} M v_0^2 = 3.23 \times 10^6 \text{ J.}$$

44. This problem involves both mechanical energy conservation $U_i = K_1 + K_2$, where $U_i = 60$ J, and momentum conservation

$$0 = m_1 \vec{v}_1 + m_2 \vec{v}_2$$

where $m_2 = 2m_1$. From the second equation, we find $|\vec{v}_1| = 2|\vec{v}_2|$ which in turn implies (since $v_1 = |\vec{v}_1|$ and likewise for v_2)

$$K_1 = \frac{1}{2} m_1 v_1^2 = \frac{1}{2} \left(\frac{1}{2} m_2 \right) (2v_2)^2 = 2 \left(\frac{1}{2} m_2 v_2^2 \right) = 2K_2.$$

(a) We substitute $K_1 = 2K_2$ into the energy conservation relation and find

$$U_i = 2K_2 + K_2 \Rightarrow K_2 = \frac{1}{3} U_i = 20 \text{ J}.$$

(b) And we obtain $K_1 = 2(20) = 40$ J.

45. (a) We choose $+x$ along the initial direction of motion and apply momentum conservation:

$$m_{\text{bullet}} \vec{v}_i = m_{\text{bullet}} \vec{v}_1 + m_{\text{block}} \vec{v}_2$$
$$(5.2 \text{ g})(672 \text{ m/s}) = (5.2 \text{ g})(428 \text{ m/s}) + (700 \text{ g})\vec{v}_2$$

which yields $v_2 = 1.81 \text{ m/s}$.

(b) It is a consequence of momentum conservation that the velocity of the center of mass is unchanged by the collision. We choose to evaluate it before the collision:

$$\vec{v}_{\text{com}} = \frac{m_{\text{bullet}} \vec{v}_i}{m_{\text{bullet}} + m_{\text{block}}} = \frac{(5.2 \text{ g})(672 \text{ m/s})}{5.2 \text{ g} + 700 \text{ g}} = 4.96 \text{ m/s}.$$

46. We refer to the discussion in the textbook (see Sample Problem 9-8, which uses the same notation that we use here) for many of the important details in the reasoning. Here we only present the primary computational step (using SI units):

$$v = \frac{m + M}{m} \sqrt{2gh} = \frac{2.010}{0.010} \sqrt{2(9.8)(0.12)} = 3.1 \times 10^2 \text{ m/s}.$$

47. This is a completely inelastic collision, but Eq. 9-53 ($V = \frac{m_1}{m_1 + m_2} v_{1i}$) is not easily applied since that equation is designed for use when the struck particle is initially stationary. To deal with this case (where particle 2 is already in motion), we return to the principle of momentum conservation:

$$m_1 \vec{v}_1 + m_2 \vec{v}_2 = (m_1 + m_2) \vec{V} \quad \Rightarrow \quad \vec{V} = \frac{2(4\hat{i} - 5\hat{j}) + 4(6\hat{i} - 2\hat{j})}{2 + 4} .$$

(a) In unit-vector notation, then,

$$\vec{V} = (2.67 \text{ m/s})\hat{i} + (-3.00 \text{ m/s})\hat{j} .$$

(b) The magnitude of \vec{V} is $|\vec{V}| = 4.01 \text{ m/s}$

(c) The direction of \vec{V} is 48.4° (measured *clockwise* from the $+x$ axis).

48. (a) The magnitude of the deceleration of each of the cars is $a = f/m = \mu_k mg/m = \mu_k g$. If a car stops in distance d , then its speed v just after impact is obtained from Eq. 2-16:

$$v^2 = v_0^2 + 2ad \Rightarrow v = \sqrt{2ad} = \sqrt{2\mu_k g d}$$

since $v_0 = 0$ (this could alternatively have been derived using Eq. 8-31). Thus,

$$v_A = \sqrt{2\mu_k g d_A} = \sqrt{2(0.13)(9.8)(8.2)} = 4.6 \text{ m/s.}$$

(b) Similarly, $v_B = \sqrt{2\mu_k g d_B} = \sqrt{2(0.13)(9.8)(6.1)} = 3.9 \text{ m/s.}$

(c) Let the speed of car B be v just before the impact. Conservation of linear momentum gives $m_B v = m_A v_A + m_B v_B$, or

$$v = \frac{(m_A v_A + m_B v_B)}{m_B} = \frac{(1100)(4.6) + (1400)(3.9)}{1400} = 7.5 \text{ m/s.}$$

(d) The conservation of linear momentum during the impact depends on the fact that the only significant force (during impact of duration Δt) is the force of contact between the bodies. In this case, that implies that the force of friction exerted by the road on the cars is neglected during the brief Δt . This neglect would introduce some error in the analysis. Related to this is the assumption we are making that the transfer of momentum occurs at one location – that the cars do not slide appreciably during Δt – which is certainly an approximation (though probably a good one). Another source of error is the application of the friction relation Eq. 6-2 for the sliding portion of the problem (after the impact); friction is a complex force that Eq. 6-2 only partially describes.

49. In solving this problem, our $+x$ direction is to the right (so all velocities are positive-valued).

(a) We apply momentum conservation to relate the situation just before the bullet strikes the second block to the situation where the bullet is embedded within the block.

$$(0.0035 \text{ kg})v = (1.8035 \text{ kg})(1.4 \text{ m/s}) \Rightarrow v = 721 \text{ m/s}.$$

(b) We apply momentum conservation to relate the situation just before the bullet strikes the first block to the instant it has passed through it (having speed v found in part (a)).

$$(0.0035 \text{ kg})v_0 = (1.20 \text{ kg})(0.630 \text{ m/s}) + (0.00350 \text{ kg})(721 \text{ m/s})$$

which yields $v_0 = 937 \text{ m/s}$.

50. We think of this as having two parts: the first is the collision itself – where the bullet passes through the block so quickly that the block has not had time to move through any distance yet – and then the subsequent “leap” of the block into the air (up to height h measured from its initial position). The first part involves momentum conservation (with +y upward):

$$(0.01\text{ kg})(1000\text{ m/s}) = (5.0\text{ kg})\vec{v} + (0.01\text{ kg})(400\text{ m/s})$$

which yields $\vec{v} = 1.2\text{ m/s}$. The second part involves either the free-fall equations from Ch. 2 (since we are ignoring air friction) or simple energy conservation from Ch. 8. Choosing the latter approach, we have

$$\frac{1}{2}(5.0\text{ kg})(1.2\text{ m/s})^2 = (5.0\text{ kg})(9.8\text{ m/s}^2)h$$

which gives the result $h = 0.073\text{ m}$.

51. We choose $+x$ in the direction of (initial) motion of the blocks, which have masses $m_1 = 5 \text{ kg}$ and $m_2 = 10 \text{ kg}$. Where units are not shown in the following, SI units are to be understood.

(a) Momentum conservation leads to

$$m_1 \vec{v}_{1i} + m_2 \vec{v}_{2i} = m_1 \vec{v}_{1f} + m_2 \vec{v}_{2f} \Rightarrow (5)(3) + (10)(2) = 5\vec{v}_{1f} + (10)(2.5)$$

which yields $\vec{v}_{1f} = 2$. Thus, the speed of the 5 kg block immediately after the collision is 2.0 m/s.

(b) We find the reduction in total kinetic energy:

$$K_i - K_f = \frac{1}{2}(5)(3)^2 + \frac{1}{2}(10)(2)^2 - \frac{1}{2}(5)(2)^2 - \frac{1}{2}(10)(2.5)^2 = -1.25 \text{ J} \approx -1.3 \text{ J}.$$

(c) In this new scenario where $\vec{v}_{2f} = 4.0 \text{ m/s}$, momentum conservation leads to $\vec{v}_{1f} = -1.0 \text{ m/s}$ and we obtain $\Delta K = +40 \text{ J}$.

(d) The creation of additional kinetic energy is possible if, say, some gunpowder were on the surface where the impact occurred (initially stored chemical energy would then be contributing to the result).

52. The total momentum immediately before the collision (with +x upward) is

$$p_i = (3.0 \text{ kg})(20 \text{ m/s}) + (2.0 \text{ kg})(-12 \text{ m/s}) = 36 \text{ kg}\cdot\text{m/s}.$$

Their momentum immediately after, when they constitute a combined mass of $M = 5.0$ kg, is $p_f = (5.0 \text{ kg}) \vec{v}$. By conservation of momentum, then, we obtain $\vec{v} = 7.2 \text{ m/s}$, which becomes their "initial" velocity for their subsequent free-fall motion. We can use Ch. 2 methods or energy methods to analyze this subsequent motion; we choose the latter. The level of their collision provides the reference ($y = 0$) position for the gravitational potential energy, and we obtain

$$K_0 + U_0 = K + U \Rightarrow \frac{1}{2} M v_0^2 + 0 = 0 + M g y_{\max}.$$

Thus, with $v_0 = 7.2 \text{ m/s}$, we find $y_{\max} = 2.6 \text{ m}$.

53. As hinted in the problem statement, the velocity v of the system as a whole – when the spring reaches the maximum compression x_m – satisfies

$$m_1 v_{1i} + m_2 v_{2i} = (m_1 + m_2)v.$$

The change in kinetic energy of the system is therefore

$$\Delta K = \frac{1}{2}(m_1 + m_2)v^2 - \frac{1}{2}m_1 v_{1i}^2 - \frac{1}{2}m_2 v_{2i}^2 = \frac{(m_1 v_{1i} + m_2 v_{2i})^2}{2(m_1 + m_2)} - \frac{1}{2}m_1 v_{1i}^2 - \frac{1}{2}m_2 v_{2i}^2$$

which yields $\Delta K = -35$ J. (Although it is not necessary to do so, still it is worth noting that algebraic manipulation of the above expression leads to $|\Delta K| = \frac{1}{2} \left(\frac{m_1 m_2}{m_1 + m_2} \right) v_{\text{rel}}^2$ where $v_{\text{rel}} = v_1 - v_2$). Conservation of energy then requires

$$\frac{1}{2} k x_m^2 = -\Delta K \Rightarrow x_m = \sqrt{\frac{-2\Delta K}{k}} = \sqrt{\frac{-2(-35)}{1120}} = 0.25 \text{ m.}$$

54. We think of this as having two parts: the first is the collision itself – where the blocks “join” so quickly that the 1.0-kg block has not had time to move through any distance yet – and then the subsequent motion of the 3.0 kg system as it compresses the spring to the maximum amount x_m . The first part involves momentum conservation (with $+x$ rightward):

$$m_1 v_1 = (m_1 + m_2) v \Rightarrow (2.0 \text{ kg})(4.0 \text{ m/s}) = (3.0 \text{ kg}) \vec{v}$$

which yields $\vec{v} = 2.7 \text{ m/s}$. The second part involves mechanical energy conservation:

$$\frac{1}{2} (3.0 \text{ kg}) (2.7 \text{ m/s})^2 = \frac{1}{2} (200 \text{ N/m}) x_m^2$$

which gives the result $x_m = 0.33 \text{ m}$.

55. (a) Let m_1 be the mass of the cart that is originally moving, v_{1i} be its velocity before the collision, and v_{1f} be its velocity after the collision. Let m_2 be the mass of the cart that is originally at rest and v_{2f} be its velocity after the collision. Then, according to Eq. 9-67,

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i}.$$

Using SI units (so $m_1 = 0.34$ kg), we obtain

$$m_2 = \frac{v_{1i} - v_{1f}}{v_{1i} + v_{1f}} m_1 = \left(\frac{1.2 - 0.66}{1.2 + 0.66} \right) (0.34) = 0.099 \text{ kg}.$$

(b) The velocity of the second cart is given by Eq. 9-68:

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} = \left(\frac{2(0.34)}{0.34 + 0.099} \right) (1.2) = 1.9 \text{ m/s}.$$

(c) The speed of the center of mass is

$$v_{\text{com}} = \frac{m_1 v_{1i} + m_2 v_{2i}}{m_1 + m_2} = \frac{(0.34)(1.2) + 0}{0.34 + 0.099} = 0.93 \text{ m/s}.$$

Values for the initial velocities were used but the same result is obtained if values for the final velocities are used.

56. (a) Let m_A be the mass of the block on the left, v_{Ai} be its initial velocity, and v_{Af} be its final velocity. Let m_B be the mass of the block on the right, v_{Bi} be its initial velocity, and v_{Bf} be its final velocity. The momentum of the two-block system is conserved, so

$$m_A v_{Ai} + m_B v_{Bi} = m_A v_{Af} + m_B v_{Bf}$$

and

$$v_{Af} = \frac{m_A v_{Ai} + m_B v_{Bi} - m_B v_{Bf}}{m_A} = \frac{(1.6)(5.5) + (2.4)(2.5) - (2.4)(4.9)}{1.6} = 1.9 \text{ m/s.}$$

(b) The block continues going to the right after the collision.

(c) To see if the collision is elastic, we compare the total kinetic energy before the collision with the total kinetic energy after the collision. The total kinetic energy before is

$$K_i = \frac{1}{2} m_A v_{Ai}^2 + \frac{1}{2} m_B v_{Bi}^2 = \frac{1}{2} (1.6)(5.5)^2 + \frac{1}{2} (2.4)(2.5)^2 = 31.7 \text{ J.}$$

The total kinetic energy after is

$$K_f = \frac{1}{2} m_A v_{Af}^2 + \frac{1}{2} m_B v_{Bf}^2 = \frac{1}{2} (1.6)(1.9)^2 + \frac{1}{2} (2.4)(4.9)^2 = 31.7 \text{ J.}$$

Since $K_i = K_f$ the collision is found to be elastic.

57. (a) Let m_1 be the mass of one sphere, v_{1i} be its velocity before the collision, and v_{1f} be its velocity after the collision. Let m_2 be the mass of the other sphere, v_{2i} be its velocity before the collision, and v_{2f} be its velocity after the collision. Then, according to Eq. 9-75,

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} + \frac{2m_2}{m_1 + m_2} v_{2i}.$$

Suppose sphere 1 is originally traveling in the positive direction and is at rest after the collision. Sphere 2 is originally traveling in the negative direction. Replace v_{1i} with v , v_{2i} with $-v$, and v_{1f} with zero to obtain $0 = m_1 - 3m_2$. Thus, $m_2 = m_1 / 3 = (300 \text{ g}) / 3 = 100 \text{ g}$.

(b) We use the velocities before the collision to compute the velocity of the center of mass:

$$v_{\text{com}} = \frac{m_1 v_{1i} + m_2 v_{2i}}{m_1 + m_2} = \frac{(300 \text{ g})(2.00 \text{ m/s}) + (100 \text{ g})(-2.00 \text{ m/s})}{300 \text{ g} + 100 \text{ g}} = 1.00 \text{ m/s}.$$

58. We use Eq 9-67 and 9-68 to find the velocities of the particles after their first collision (at $x = 0$ and $t = 0$):

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} = \frac{-0.1 \text{ kg}}{0.7 \text{ kg}} (2.0 \text{ m/s}) = \frac{-2}{7} \text{ m/s}$$

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{0.6 \text{ kg}}{0.7 \text{ kg}} (2.0 \text{ m/s}) = \frac{12}{7} \text{ m/s} \approx 1.7 \text{ m/s}.$$

At a rate of motion of 1.7 m/s, $2x_w = 140 \text{ cm}$ (the distance to the wall and back to $x = 0$) will be traversed by particle 2 in 0.82 s. At $t = 0.82 \text{ s}$, particle 1 is located at

$$x = (-2/7)(0.82) = -23 \text{ cm},$$

and particle 2 is “gaining” at a rate of $(10/7) \text{ m/s}$ leftward; this is their relative velocity at that time. Thus, this “gap” of 23 cm between them will be closed after an additional time of $(0.23 \text{ m}) / (10/7 \text{ m/s}) = 0.16 \text{ s}$ has passed. At this time ($t = 0.82 + 0.16 = 0.98 \text{ s}$) the two particles are at $x = (-2/7)(0.98) = -28 \text{ cm}$.

59. (a) Let m_1 be the mass of the body that is originally moving, v_{1i} be its velocity before the collision, and v_{1f} be its velocity after the collision. Let m_2 be the mass of the body that is originally at rest and v_{2f} be its velocity after the collision. Then, according to Eq. 9-67,

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} .$$

We solve for m_2 to obtain

$$m_2 = \frac{v_{1i} - v_{1f}}{v_{1f} + v_{1i}} m_1 .$$

We combine this with $v_{1f} = v_{1i} / 4$ to obtain $m_2 = 3m_1/5 = 3(2.0)/5 = 1.2 \text{ kg}$.

(b) The speed of the center of mass is

$$v_{\text{com}} = \frac{m_1 v_{1i} + m_2 v_{2i}}{m_1 + m_2} = \frac{(2.0)(4.0)}{2.0 + 1.2} = 2.5 \text{ m/s} .$$

60. First, we find the speed v of the ball of mass m_1 right before the collision (just as it reaches its lowest point of swing). Mechanical energy conservation (with $h = 0.700$ m) leads to

$$m_1gh = \frac{1}{2}m_1v^2 \Rightarrow v = \sqrt{2gh} = 3.7 \text{ m/s}.$$

(a) We now treat the elastic collision (with SI units) using Eq. 9-67:

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v = \frac{0.5 - 2.5}{0.5 + 2.5} (3.7) = -2.47$$

which means the final speed of the ball is 2.47 m/s.

(b) Finally, we use Eq. 9-68 to find the final speed of the block:

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v = \frac{2(0.5)}{0.5 + 2.5} (3.7) = 1.23 \text{ m/s}.$$

61. (a) The center of mass velocity does not change in the absence of external forces. In this collision, only forces of one block on the other (both being part of the same system) are exerted, so the center of mass velocity is 3.00 m/s before and after the collision.

(b) We can find the velocity v_{1i} of block 1 before the collision (when the velocity of block 2 is known to be zero) using Eq. 9-17:

$$(m_1 + m_2)v_{\text{com}} = m_1 v_{1i} + 0 \quad \Rightarrow \quad v_{1i} = 12.0 \text{ m/s} .$$

Now we use Eq. 9-68 to find v_{2f} :

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} = 6.00 \text{ m/s} .$$

62. (a) If the collision is perfectly elastic, then Eq. 9-68 applies

$$v_2 = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{2m_1}{m_1 + (2.00)m_1} \sqrt{2gh} = \frac{2}{3} \sqrt{2gh}$$

where we have used the fact (found most easily from energy conservation) that the speed of block 1 at the bottom of the frictionless ramp is $\sqrt{2gh}$ (where $h = 2.50$ m). Next, for block 2's "rough slide" we use Eq. 8-37:

$$\frac{1}{2} m_2 v_2^2 = \Delta E_{\text{th}} = f_k d = \mu_k m_2 g d.$$

where $\mu_k = 0.500$. Solving for the sliding distance d , we find that m_2 cancels out and we obtain $d = 2.22$ m.

(b) In a completely inelastic collision, we apply Eq. 9-53: $v_2 = \frac{m_1}{m_1 + m_2} v_{1i}$ (where, as above, $v_{1i} = \sqrt{2gh}$). Thus, in this case we have $v_2 = \sqrt{2gh}/3$. Now, Eq. 8-37 (using the total mass since the blocks are now joined together) leads to a sliding distance of $d = 0.556$ m (one-fourth of the part (a) answer).

63. (a) We use conservation of mechanical energy to find the speed of either ball after it has fallen a distance h . The initial kinetic energy is zero, the initial gravitational potential energy is Mgh , the final kinetic energy is $\frac{1}{2}Mv^2$, and the final potential energy is zero. Thus $Mgh = \frac{1}{2}Mv^2$ and $v = \sqrt{2gh}$. The collision of the ball of M with the floor is an elastic collision of a light object with a stationary massive object. The velocity of the light object reverses direction without change in magnitude. After the collision, the ball is traveling upward with a speed of $\sqrt{2gh}$. The ball of mass m is traveling downward with the same speed. We use Eq. 9-75 to find an expression for the velocity of the ball of mass M after the collision:

$$v_{Mf} = \frac{M-m}{M+m}v_{Mi} + \frac{2m}{M+m}v_{mi} = \frac{M-m}{M+m}\sqrt{2gh} - \frac{2m}{M+m}\sqrt{2gh} = \frac{M-3m}{M+m}\sqrt{2gh}.$$

For this to be zero, $m = M/3$. With $M = 0.63$ kg, we have $m = 0.21$ kg.

(b) We use the same equation to find the velocity of the ball of mass m after the collision:

$$v_{mf} = -\frac{m-M}{M+m}\sqrt{2gh} + \frac{2M}{M+m}\sqrt{2gh} = \frac{3M-m}{M+m}\sqrt{2gh}$$

which becomes (upon substituting $M = 3m$) $v_{mf} = 2\sqrt{2gh}$. We next use conservation of mechanical energy to find the height h' to which the ball rises. The initial kinetic energy is $\frac{1}{2}mv_{mf}^2$, the initial potential energy is zero, the final kinetic energy is zero, and the final potential energy is mgh' . Thus

$$\frac{1}{2}mv_{mf}^2 = mgh' \Rightarrow h' = \frac{v_{mf}^2}{2g} = 4h.$$

With $h = 1.8$ m, we have $h' = 7.2$ m.

64. We use Eqs. 9-67, 9-68 and 4-21 for the elastic collision and the subsequent projectile motion. We note that both pucks have the same time-of-fall t (during their projectile motions). Thus, we have

$$\Delta x_2 = v_2 t \quad \text{where } \Delta x_2 = d \quad \text{and} \quad v_2 = \frac{2m_1}{m_1 + m_2} v_{1i}$$

$$\Delta x_1 = v_1 t \quad \text{where } \Delta x_1 = -2d \quad \text{and} \quad v_1 = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} .$$

Dividing the first equation by the second, we arrive at

$$\frac{d}{-2d} = \frac{\frac{2m_1}{m_1 + m_2} v_{1i} t}{\frac{m_1 - m_2}{m_1 + m_2} v_{1i} t} .$$

After canceling v_{1i} , t and d , and solving, we obtain $m_2 = 1.0 \text{ kg}$.

65. We apply the conservation of linear momentum to the x and y axes respectively.

$$\begin{aligned} m_1 v_{1i} &= m_1 v_{1f} \cos \theta_1 + m_2 v_{2f} \cos \theta_2 \\ 0 &= m_1 v_{1f} \sin \theta_1 - m_2 v_{2f} \sin \theta_2 \end{aligned}$$

We are given $v_{2f} = 1.20 \times 10^5$ m/s, $\theta_1 = 64.0^\circ$ and $\theta_2 = 51.0^\circ$. Thus, we are left with two unknowns and two equations, which can be readily solved.

(a) We solve for the final alpha particle speed using the y -momentum equation:

$$v_{1f} = \frac{m_2 v_{2f} \sin \theta_2}{m_1 \sin \theta_1} = \frac{(16.0) (1.20 \times 10^5) \sin (51.0^\circ)}{(4.00) \sin (64.0^\circ)} = 4.15 \times 10^5 \text{ m/s}.$$

(b) Plugging our result from part (a) into the x -momentum equation produces the initial alpha particle speed:

$$\begin{aligned} v_{1i} &= \frac{m_1 v_{1f} \cos \theta_1 + m_2 v_{2f} \cos \theta_2}{m_{1i}} \\ &= \frac{(4.00) (4.15 \times 10^5) \cos (64.0^\circ) + (16.0) (1.2 \times 10^5) \cos (51.0^\circ)}{4.00} \\ &= 4.84 \times 10^5 \text{ m/s}. \end{aligned}$$

66. (a) Conservation of linear momentum implies

$$m_A \vec{v}_A + m_B \vec{v}_B = m_A \vec{v}'_A + m_B \vec{v}'_B .$$

Since $m_A = m_B = m = 2.0$ kg, the masses divide out and we obtain (in m/s)

$$\vec{v}'_B = \vec{v}_A + \vec{v}_B - \vec{v}'_A = (15\hat{i} + 30\hat{j}) + (-10\hat{i} + 5\hat{j}) - (-5\hat{i} + 20\hat{j}) = 10\hat{i} + 15\hat{j} .$$

(b) The final and initial kinetic energies are

$$K_f = \frac{1}{2} m v'^2_A + \frac{1}{2} m v'^2_B = \frac{1}{2} (2.0) \left((-5)^2 + 20^2 + 10^2 + 15^2 \right) = 8.0 \times 10^2 \text{ J}$$

$$K_i = \frac{1}{2} m v^2_A + \frac{1}{2} m v^2_B = \frac{1}{2} (2.0) \left(15^2 + 30^2 + (-10)^2 + 5^2 \right) = 1.3 \times 10^3 \text{ J} .$$

The change kinetic energy is then $\Delta K = -5.0 \times 10^2$ J (that is, 500 J of the initial kinetic energy is lost).

67. We orient our $+x$ axis along the initial direction of motion, and specify angles in the “standard” way — so $\theta = +60^\circ$ for the proton (1) which is assumed to scatter into the first quadrant and $\phi = -30^\circ$ for the target proton (2) which scatters into the fourth quadrant (recall that the problem has told us that this is perpendicular to θ). We apply the conservation of linear momentum to the x and y axes respectively.

$$\begin{aligned} m_1 v_1 &= m_1 v'_1 \cos \theta + m_2 v'_2 \cos \phi \\ 0 &= m_1 v'_1 \sin \theta + m_2 v'_2 \sin \phi \end{aligned}$$

We are given $v_1 = 500$ m/s, which provides us with two unknowns and two equations, which is sufficient for solving. Since $m_1 = m_2$ we can cancel the mass out of the equations entirely.

(a) Combining the above equations and solving for v'_2 we obtain

$$v'_2 = \frac{v_1 \sin \theta}{\sin (\theta - \phi)} = \frac{500 \sin(60^\circ)}{\sin (90^\circ)} = 433 \text{ m/s}.$$

We used the identity $\sin \theta \cos \phi - \cos \theta \sin \phi = \sin (\theta - \phi)$ in simplifying our final expression.

(b) In a similar manner, we find

$$v'_1 = \frac{v_1 \sin \theta}{\sin (\phi - \theta)} = \frac{500 \sin(-30^\circ)}{\sin (-90^\circ)} = 250 \text{ m/s}.$$

68. We orient our $+x$ axis along the initial direction of motion, and specify angles in the “standard” way — so $\theta = -90^\circ$ for the particle B which is assumed to scatter “downward” and $\phi > 0$ for particle A which presumably goes into the first quadrant. We apply the conservation of linear momentum to the x and y axes respectively.

$$\begin{aligned} m_B v_B &= m_B v'_B \cos \theta + m_A v'_A \cos \phi \\ 0 &= m_B v'_B \sin \theta + m_A v'_A \sin \phi \end{aligned}$$

(a) Setting $v_B = v$ and $v'_B = v/2$, the y -momentum equation yields

$$m_A v'_A \sin \phi = m_B \frac{v}{2}$$

and the x -momentum equation yields $m_A v'_A \cos \phi = m_B v$.

Dividing these two equations, we find $\tan \phi = \frac{1}{2}$ which yields $\phi = 27^\circ$.

(b) We can *formally* solve for v'_A (using the y -momentum equation and the fact that $\phi = 1/\sqrt{5}$)


$$v'_A = \frac{\sqrt{5}}{2} \frac{m_B}{m_A} v$$

but lacking numerical values for v and the mass ratio, we cannot fully determine the final speed of A . Note: substituting $\cos \phi = 2/\sqrt{5}$, into the x -momentum equation leads to exactly this same relation (that is, no new information is obtained which might help us determine an answer).

69. Suppose the objects enter the collision along lines that make the angles $\theta > 0$ and $\phi > 0$ with the x axis, as shown in the diagram that follows. Both have the same mass m and the same initial speed v . We suppose that after the collision the combined object moves in the positive x direction with speed V . Since the y component of the total momentum of the two-object system is conserved,

$$mv \sin \theta - mv \sin \phi = 0.$$

This means $\phi = \theta$. Since the x component is conserved, $2mv \cos \theta = 2mV$. We now use $V = v/2$ to find that $\cos \theta = 1/2$. This means $\theta = 60^\circ$. The angle between the initial velocities is 120° .

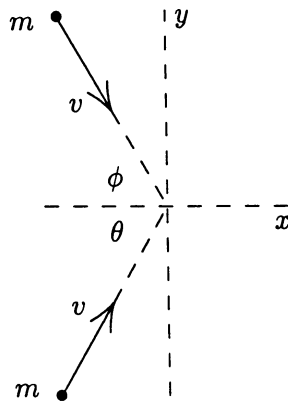

70. We use Eq. 9-88 and simplify with $v_i = 0$, $v_f = v$, and $v_{\text{rel}} = u$.

$$v_f - v_i = v_{\text{rel}} \ln \frac{M_i}{M_f} \Rightarrow \frac{M_i}{M_f} = e^{v/u}$$

(a) If $v = u$ we obtain $\frac{M_i}{M_f} = e^1 \approx 2.7$.

(b) If $v = 2u$ we obtain $\frac{M_i}{M_f} = e^2 \approx 7.4$.

71. (a) The thrust of the rocket is given by $T = Rv_{\text{rel}}$ where R is the rate of fuel consumption and v_{rel} is the speed of the exhaust gas relative to the rocket. For this problem $R = 480 \text{ kg/s}$ and $v_{\text{rel}} = 3.27 \times 10^3 \text{ m/s}$, so

$$T = (480 \text{ kg/s})(3.27 \times 10^3 \text{ m/s}) = 1.57 \times 10^6 \text{ N}.$$

(b) The mass of fuel ejected is given by $M_{\text{fuel}} = R\Delta t$, where Δt is the time interval of the burn. Thus, $M_{\text{fuel}} = (480 \text{ kg/s})(250 \text{ s}) = 1.20 \times 10^5 \text{ kg}$. The mass of the rocket after the burn is

$$M_f = M_i - M_{\text{fuel}} = (2.55 \times 10^5 \text{ kg}) - (1.20 \times 10^5 \text{ kg}) = 1.35 \times 10^5 \text{ kg}.$$

(c) Since the initial speed is zero, the final speed is given by

$$v_f = v_{\text{rel}} \ln \frac{M_i}{M_f} = (3.27 \times 10^3) \ln \left(\frac{2.55 \times 10^5}{1.35 \times 10^5} \right) = 2.08 \times 10^3 \text{ m/s}.$$

72. We use Eq. 9-88. Then

$$v_f = v_i + v_{\text{rel}} \ln \left(\frac{M_i}{M_f} \right) = 105 \text{ m/s} + (253 \text{ m/s}) \ln \left(\frac{6090 \text{ kg}}{6010 \text{ kg}} \right) = 108 \text{ m/s}.$$

73. (a) We consider what must happen to the coal that lands on the faster barge during one minute ($\Delta t = 60\text{s}$). In that time, a total of $m = 1000\text{ kg}$ of coal must experience a change of velocity $\Delta v = 20\text{km/h} - 10\text{km/h} = 10\text{km/h} = 2.8\text{m/s}$, where rightwards is considered the positive direction. The rate of change in momentum for the coal is therefore

$$\frac{\Delta \vec{p}}{\Delta t} = \frac{m\Delta \vec{v}}{\Delta t} = \frac{(1000)(2.8)}{60} = 46\text{ N}$$

which, by Eq. 9-23, must equal the force exerted by the (faster) barge on the coal. The processes (the shoveling, the barge motions) are constant, so there is no ambiguity in equating $\frac{\Delta p}{\Delta t}$ with $\frac{dp}{dt}$.

(b) The problem states that the frictional forces acting on the barges does not depend on mass, so the loss of mass from the slower barge does not affect its motion (so no extra force is required as a result of the shoveling).

74. (a) This is a highly symmetric collision, and when we analyze the y -components of momentum we find their net value is zero. Thus, the stuck-together particles travel along the x axis.

(b) Since it is an elastic collision with identical particles, the final speeds are the same as the initial values. Conservation of momentum along each axis then assures that the angles of approach are the same as the angles of scattering. Therefore, one particle travels along line 2, the other along line 3.

(c) Here the final speeds are less than they were initially. The total x -component cannot be less, however, by momentum conservation, so the loss of speed shows up as a decrease in their y -velocity-components. This leads to smaller angles of scattering. Consequently, one particle travels through region B , the other through region C ; the paths are symmetric about the x -axis. We note that this is intermediate between the final states described in parts (b) and (a).

(d) Conservation of momentum along the x -axis leads (because these are identical particles) to the simple observation that the x -component of each particle remains constant:

$$v_{fx} = v \cos \theta = 3.06 \text{ m/s.}$$

(e) As noted above, in this case the speeds are unchanged; both particles are moving at 4.00 m/s in the final state.

75. (a) We use Eq. 9-68 twice:

$$v_2 = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{2m_1}{1.5m_1} (4.00 \text{ m/s}) = \frac{16}{3} \text{ m/s}$$
$$v_3 = \frac{2m_2}{m_2 + m_3} v_2 = \frac{2m_2}{1.5m_2} (16/3 \text{ m/s}) = \frac{64}{9} \text{ m/s} = 7.11 \text{ m/s} .$$

(b) Clearly, the speed of block 3 is greater than the (initial) speed of block 1.

(c) The kinetic energy of block 3 is

$$K_{3f} = \frac{1}{2} m_3 v_3^2 = \left(\frac{1}{2}\right)^3 m_1 \left(\frac{16}{9}\right)^2 v_{1i}^2 = \frac{64}{81} K_{1i} .$$

We see the kinetic energy of block 3 is less than the (initial) K of block 1. In the final situation, the initial K is being shared among the three blocks (which are all in motion), so this is not a surprising conclusion.

(d) The momentum of block 3 is

$$p_{3f} = m_3 v_3 = \left(\frac{1}{2}\right)^2 m_1 \left(\frac{16}{9}\right) v_{1i} = \frac{4}{9} p_{1i}$$

and is therefore less than the initial momentum (both of these being considered in magnitude, so questions about \pm sign do not enter the discussion).

76. Using Eq. 9-67 and Eq. 9-68, we have after the first collision

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} = \frac{-m_1}{3m_1} v_{1i} = -\frac{1}{3} v_{1i}$$

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{2m_1}{3m_1} v_{1i} = \frac{2}{3} v_{1i} .$$

After the second collision, the velocities are

$$v_{2ff} = \frac{m_2 - m_3}{m_2 + m_3} v_{2f} = \frac{-m_2}{3m_2} \frac{2}{3} v_{1i} = -\frac{2}{9} v_{1i}$$

$$v_{3ff} = \frac{2m_2}{m_2 + m_3} v_{2f} = \frac{2m_2}{3m_2} \frac{2}{3} v_{1i} = \frac{4}{9} v_{1i} .$$

(a) Setting $v_{1i} = 4$ m/s, we find $v_{3ff} \approx 1.78$ m/s.

(b) We see that v_{3ff} is less than v_{1i} .

(c) The final kinetic energy of block 3 (expressed in terms of the initial kinetic energy of block 1) is

$$K_{3ff} = \frac{1}{2} m_3 v_{3ff}^2 = \frac{1}{2} (4m_1) \left(\frac{16}{9}\right)^2 v_{1i}^2 = \frac{64}{81} K_{1i} .$$

We see that this is less than K_{1i} .

(d) The final momentum of block 3 is $p_{3ff} = m_3 v_{3ff} = (4m_1) \left(\frac{16}{9}\right) v_1 > m_1 v_1$.

77. (a) Momentum conservation gives

$$m_R v_R + m_L v_L = 0 \Rightarrow (0.500) v_R + (1.00)(-1.2) = 0$$

which yields $v_R = 2.40$ m/s. Thus, $\Delta x = v_R t = (2.40)(0.800) = 1.92$ m.

(b) Now we have $m_R v_R + m_L(v_R - 1.20) = 0$, which yields

$$v_R = \frac{1.2 m_L}{m_L + m_R} = \frac{(1.2)(1)}{1 + 0.5} = 0.800 \text{ m/s.}$$

Consequently, $\Delta x = v_R t = 0.640$ m.

78. Momentum conservation (with SI units understood) gives

$$m_1(v_f - 20) + (M - m_1)v_f = Mv_i$$

which yields

$$v_f = \frac{Mv_i + 20m_1}{M} = v_i + 20\frac{m_1}{M} = 40 + 20(m_1/M).$$

- (a) The minimum value of v_f is 40 m/s,
- (b) The final speed v_f reaches a minimum as m_1 approaches zero.
- (c) The maximum value of v_f is 60 m/s.
- (d) The final speed v_f reaches a maximum as m_1 approaches M .

79. We convert mass rate to SI units: $R = 540/60 = 9.00 \text{ kg/s}$. In the absence of the asked-for additional force, the car would decelerate with a magnitude given by Eq. 9-87:

$$R v_{\text{rel}} = M |a|$$

so that if $a = 0$ is desired then the additional force must have a magnitude equal to $R v_{\text{rel}}$ (so as to cancel that effect).

$$F = R v_{\text{rel}} = (9.00)(3.20) = 28.8 \text{ N}.$$

80. Denoting the new speed of the car as v , then the new speed of the man relative to the ground is $v - v_{\text{rel}}$. Conservation of momentum requires

$$\left(\frac{W}{g} + \frac{w}{g}\right)v_0 = \left(\frac{W}{g}\right)v + \left(\frac{w}{g}\right)(v - v_{\text{rel}}).$$

Consequently, the change of velocity is

$$\Delta \vec{v} = v - v_0 = \frac{w v_{\text{rel}}}{W + w} = \frac{(915 \text{ N})(4.00 \text{ m/s})}{(2415 \text{ N}) + (915 \text{ N})} = 1.10 \text{ m/s}.$$

81. (a) We place the origin of a coordinate system at the center of the pulley, with the x axis horizontal and to the right and with the y axis downward. The center of mass is halfway between the containers, at $x = 0$ and $y = \ell$, where ℓ is the vertical distance from the pulley center to either of the containers. Since the diameter of the pulley is 50 mm, the center of mass is at a horizontal distance of 25 mm from each container.

(b) Suppose 20 g is transferred from the container on the left to the container on the right. The container on the left has mass $m_1 = 480$ g and is at $x_1 = -25$ mm. The container on the right has mass $m_2 = 520$ g and is at $x_2 = +25$ mm. The x coordinate of the center of mass is then

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{(480 \text{ g})(-25 \text{ mm}) + (520 \text{ g})(25 \text{ mm})}{480 \text{ g} + 520 \text{ g}} = 1.0 \text{ mm}.$$

The y coordinate is still ℓ . The center of mass is 26 mm from the lighter container, along the line that joins the bodies.

(c) When they are released the heavier container moves downward and the lighter container moves upward, so the center of mass, which must remain closer to the heavier container, moves downward.

(d) Because the containers are connected by the string, which runs over the pulley, their accelerations have the same magnitude but are in opposite directions. If a is the acceleration of m_2 , then $-a$ is the acceleration of m_1 . The acceleration of the center of mass is

$$a_{\text{com}} = \frac{m_1(-a) + m_2 a}{m_1 + m_2} = a \frac{m_2 - m_1}{m_1 + m_2}.$$

We must resort to Newton's second law to find the acceleration of each container. The force of gravity $m_1 g$, down, and the tension force of the string T , up, act on the lighter container. The second law for it is $m_1 g - T = -m_1 a$. The negative sign appears because a is the acceleration of the heavier container. The same forces act on the heavier container and for it the second law is $m_2 g - T = m_2 a$. The first equation gives $T = m_1 g + m_1 a$. This is substituted into the second equation to obtain $m_2 g - m_1 g - m_1 a = m_2 a$, so

$$a = (m_2 - m_1)g / (m_1 + m_2).$$

Thus,

$$a_{\text{com}} = \frac{g(m_2 - m_1)^2}{(m_1 + m_2)^2} = \frac{(9.8 \text{ m/s}^2)(520 \text{ g} - 480 \text{ g})^2}{(480 \text{ g} + 520 \text{ g})^2} = 1.6 \times 10^{-2} \text{ m/s}^2.$$

The acceleration is downward.

82. First, we imagine that the small square piece (of mass m) that was cut from the large plate is returned to it so that the large plate is again a complete $6\text{ m} \times 6\text{ m}$ ($d = 1.0\text{ m}$) square plate (which has its center of mass at the origin). Then we “add” a square piece of “negative mass” ($-m$) at the appropriate location to obtain what is shown in Fig. 9-75. If the mass of the whole plate is M , then the mass of the small square piece cut from it is obtained from a simple ratio of areas:

$$m = \left(\frac{2.0\text{ m}}{6.0\text{ m}} \right)^2 M \Rightarrow M = 9m.$$

(a) The x coordinate of the small square piece is $x = 2.0\text{ m}$ (the middle of that square “gap” in the figure). Thus the x coordinate of the center of mass of the remaining piece is

$$x_{\text{com}} = \frac{(-m)x}{M + (-m)} = \frac{-m(2.0\text{ m})}{9m - m} = -0.25\text{ m}.$$

(b) Since the y coordinate of the small square piece is zero, we have $y_{\text{com}} = 0$.

83. By the principle of momentum conservation, we must have

$$m_1 \vec{v}_1 + m_2 \vec{v}_2 + m_3 \vec{v}_3 = 0,$$

which implies

$$\vec{v}_3 = -\frac{m_1 \vec{v}_1 + m_2 \vec{v}_2}{m_3}.$$

With

$$m_1 \vec{v}_1 = (0.500)(10.0\hat{i} + 12.0\hat{j}) = 5.00\hat{i} + 6.00\hat{j}$$

$$m_2 \vec{v}_2 = (0.750)(14.0)(\cos 110^\circ \hat{i} + \sin 110^\circ \hat{j}) = -3.59\hat{i} + 9.87\hat{j}$$

(in SI units) and $m_3 = m - m_1 - m_2 = (2.65 - 0.500 - 0.750)\text{kg} = 1.40\text{ kg}$, we solve for \vec{v}_3 and obtain $\vec{v}_3 = (-1.01\text{ m/s})\hat{i} + (-11.3\text{ m/s})\hat{j}$.

(a) The magnitude of \vec{v}_3 is $|\vec{v}_3| = 11.4\text{ m/s}$.

(b) Its angle is 264.9° , which means it is 95.1° clockwise from the $+x$ axis.

84. Using Eq. 9-75 and Eq. 9-76, we find after the collision

$$(a) \quad v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} + \frac{2m_2}{m_1 + m_2} v_{2i} = (-3.8 \text{ m/s})\hat{i}, \text{ and}$$

$$(b) \quad v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} + \frac{m_2 - m_1}{m_1 + m_2} v_{2i} = (7.2 \text{ m/s})\hat{i}.$$

85. We assume no external forces act on the system composed of the two parts of the last stage. Hence, the total momentum of the system is conserved. Let m_c be the mass of the rocket case and m_p the mass of the payload. At first they are traveling together with velocity v . After the clamp is released m_c has velocity v_c and m_p has velocity v_p . Conservation of momentum yields

$$(m_c + m_p)v = m_cv_c + m_pv_p.$$

(a) After the clamp is released the payload, having the lesser mass, will be traveling at the greater speed. We write $v_p = v_c + v_{\text{rel}}$, where v_{rel} is the relative velocity. When this expression is substituted into the conservation of momentum condition, the result is

$$(m_c + m_p)v = m_cv_c + m_pv_c + m_pv_{\text{rel}}.$$

Therefore,

$$\begin{aligned} v_c &= \frac{(m_c + m_p)v - m_pv_{\text{rel}}}{m_c + m_p} = \frac{(290.0 \text{ kg} + 150.0 \text{ kg})(7600 \text{ m/s}) - (150.0 \text{ kg})(910.0 \text{ m/s})}{290.0 \text{ kg} + 150.0 \text{ kg}} \\ &= 7290 \text{ m/s}. \end{aligned}$$

(b) The final speed of the payload is $v_p = v_c + v_{\text{rel}} = 7290 \text{ m/s} + 910.0 \text{ m/s} = 8200 \text{ m/s}$.

(c) The total kinetic energy before the clamp is released is

$$K_i = \frac{1}{2}(m_c + m_p)v^2 = \frac{1}{2}(290.0 \text{ kg} + 150.0 \text{ kg})(7600 \text{ m/s})^2 = 1.271 \times 10^{10} \text{ J}.$$

(d) The total kinetic energy after the clamp is released is

$$\begin{aligned} K_f &= \frac{1}{2}m_cv_c^2 + \frac{1}{2}m_pv_p^2 = \frac{1}{2}(290.0 \text{ kg})(7290 \text{ m/s})^2 + \frac{1}{2}(150.0 \text{ kg})(8200 \text{ m/s})^2 \\ &= 1.275 \times 10^{10} \text{ J}. \end{aligned}$$

The total kinetic energy increased slightly. Energy originally stored in the spring is converted to kinetic energy of the rocket parts.

86. Using Eq. 9-67, we have after the elastic collision

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} = \frac{-200 \text{ g}}{600 \text{ g}} v_{1i} = -\frac{1}{3}(3 \text{ m/s}) = -1 \text{ m/s} .$$

(a) The impulse is therefore

$$J = m_1 v_{1f} - m_1 v_{1i} = (0.2)(-1) - (0.2)(3) = -0.800 \text{ N}\cdot\text{s} = -0.800 \text{ kg}\cdot\text{m/s},$$

or $|J| = 0.800 \text{ kg}\cdot\text{m/s}$.

(b) For the completely inelastic collision Eq. 9-75 applies

$$v_{1f} = V = \frac{m_1}{m_1 + m_2} v_{1i} = +1 \text{ m/s} .$$

Now the impulse is

$$J = m_1 v_{1f} - m_1 v_{1i} = (0.2)(1) - (0.2)(3) = 0.400 \text{ N}\cdot\text{s} = 0.400 \text{ kg}\cdot\text{m/s}.$$

87. The velocity of the object is

$$\vec{v} = \frac{d\vec{r}}{dt} = \frac{d}{dt} \left((3500 - 160t) \hat{i} + 2700 \hat{j} + 300 \hat{k} \right) = -160 \hat{i} \text{ m/s}.$$

(a) The linear momentum is $\vec{p} = m\vec{v} = (250) (-160 \hat{i}) = (-4.0 \times 10^4 \text{ kg} \cdot \text{m/s}) \hat{i}$.

(b) The object is moving west (our $-\hat{i}$ direction).

(c) Since the value of \vec{p} does not change with time, the net force exerted on the object is zero, by Eq. 9-23.

88. We refer to the discussion in the textbook (Sample Problem 9-10, which uses the same notation that we use here) for some important details in the reasoning. We choose rightward in Fig. 9-21 as our $+x$ direction. We use the notation \vec{v} when we refer to velocities and v when we refer to speeds (which are necessarily positive). Since the algebra is fairly involved, we find it convenient to introduce the notation $\Delta m = m_2 - m_1$ (which, we note for later reference, is a positive-valued quantity).

(a) Since $\vec{v}_{1i} = +\sqrt{2gh_1}$ where $h_1 = 9.0$ cm, we have

$$\vec{v}_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} = -\frac{\Delta m}{m_1 + m_2} \sqrt{2gh_1}$$

which is to say that the *speed* of sphere 1 immediately after the collision is $v_{1f} = (\Delta m / (m_1 + m_2)) \sqrt{2gh_1}$ and that \vec{v}_{1f} points in the $-x$ direction. This leads (by energy conservation $m_1 gh_{1f} = \frac{1}{2} m_1 v_{1f}^2$) to

$$h_{1f} = \frac{v_{1f}^2}{2g} = \left(\frac{\Delta m}{m_1 + m_2} \right)^2 h_1 .$$

With $m_1 = 50$ g and $m_2 = 85$ g, this becomes $h_{1f} \approx 0.60$ cm .

(b) Eq. 9-68 gives

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{2m_1}{m_1 + m_2} \sqrt{2gh_1}$$

which leads (by energy conservation $m_2 gh_{2f} = \frac{1}{2} m_2 v_{2f}^2$) to

$$h_{2f} = \frac{v_{2f}^2}{2g} = \left(\frac{2m_1}{m_1 + m_2} \right)^2 h_1 .$$

With $m_1 = 50$ g and $m_2 = 85$ g, this becomes $h_{2f} \approx 4.9$ cm .

(c) Fortunately, they hit again at the lowest point (as long as their amplitude of swing was “small” – this is further discussed in Chapter 16). At the risk of using cumbersome notation, we refer to the *next* set of heights as h_{1ff} and h_{2ff} . At the lowest point (before this second collision) sphere 1 has velocity $+\sqrt{2gh_{1f}}$ (rightward in Fig. 9-21) and sphere 2

has velocity $-\sqrt{2gh_{1f}}$ (that is, it points in the $-x$ direction). Thus, the velocity of sphere 1 immediately after the second collision is, using Eq. 9-75,

$$\begin{aligned}\vec{v}_{1ff} &= \frac{m_1 - m_2}{m_1 + m_2} \sqrt{2gh_{1f}} + \frac{2m_2}{m_1 + m_2} (-\sqrt{2gh_{2f}}) \\ &= \frac{-\Delta m}{m_1 + m_2} \left(\frac{\Delta m}{m_1 + m_2} \sqrt{2gh_1} \right) - \frac{2m_2}{m_1 + m_2} \left(\frac{2m_1}{m_1 + m_2} \sqrt{2gh_1} \right) \\ &= -\frac{(\Delta m)^2 + 4m_1m_2}{(m_1 + m_2)^2} \sqrt{2gh_1} .\end{aligned}$$

This can be greatly simplified (by expanding $(\Delta m)^2$ and $(m_1 + m_2)^2$) to arrive at the conclusion that the speed of sphere 1 immediately after the second collision is simply $v_{1ff} = \sqrt{2gh_1}$ and that \vec{v}_{1ff} points in the $-x$ direction. Energy conservation ($m_1gh_{1ff} = \frac{1}{2}m_1v_{1ff}^2$) leads to

$$h_{1ff} = \frac{v_{1ff}^2}{2g} = h_1 = 9.0 \text{ cm} .$$

(d) One can reason (energy-wise) that $h_{1ff} = 0$ simply based on what we found in part (c). Still, it might be useful to see how this shakes out of the algebra. Eq. 9-76 gives the velocity of sphere 2 immediately after the second collision:

$$\begin{aligned}v_{2ff} &= \frac{2m_1}{m_1 + m_2} \sqrt{2gh_{1f}} + \frac{m_2 - m_1}{m_1 + m_2} (-\sqrt{2gh_{2f}}) \\ &= \frac{2m_1}{m_1 + m_2} \left(\frac{\Delta m}{m_1 + m_2} \sqrt{2gh_1} \right) + \frac{\Delta m}{m_1 + m_2} \left(\frac{-2m_1}{m_1 + m_2} \sqrt{2gh_1} \right)\end{aligned}$$

which vanishes since $(2m_1)(\Delta m) - (\Delta m)(2m_1) = 0$. Thus, the second sphere (after the second collision) stays at the lowest point, which basically recreates the conditions at the start of the problem (so all subsequent swings-and-impacts, neglecting friction, can be easily predicted – as they are just replays of the first two collisions).

89. (a) Since the center of mass of the man-balloon system does not move, the balloon will move downward with a certain speed u relative to the ground as the man climbs up the ladder.

(b) The speed of the man relative to the ground is $v_g = v - u$. Thus, the speed of the center of mass of the system is

$$v_{\text{com}} = \frac{mv_g - Mu}{M + m} = \frac{m(v - u) - Mu}{M + m} = 0.$$

This yields

$$u = \frac{mv}{M + m} = \frac{(80 \text{ kg})(2.5 \text{ m/s})}{320 \text{ kg} + 80 \text{ kg}} = 0.50 \text{ m/s}.$$

(c) Now that there is no relative motion within the system, the speed of both the balloon and the man is equal to v_{com} , which is zero. So the balloon will again be stationary.

90. (a) The momentum change for the 0.15 kg object is

$$\Delta \vec{p} = (0.15)[2 \hat{i} + 3.5 \hat{j} - 3.2 \hat{k} - (5 \hat{i} + 6.5 \hat{j} + 4 \hat{k})] = (-0.450 \hat{i} - 0.450 \hat{j} - 1.08 \hat{k}) \text{ kg}\cdot\text{m/s}.$$

(b) By the impulse-momentum theorem (Eq. 9-31), $\vec{J} = \Delta \vec{p}$, we have

$$\vec{J} = (-0.450 \hat{i} - 0.450 \hat{j} - 1.08 \hat{k}) \text{ N}\cdot\text{s}.$$

(c) Newton's third law implies $\vec{J}_{\text{wall}} = -\vec{J}_{\text{ball}}$ (where \vec{J}_{ball} is the result of part (b)), so

$$\vec{J}_{\text{wall}} = (0.450 \hat{i} + 0.450 \hat{j} + 1.08 \hat{k}) \text{ N}\cdot\text{s}.$$

91. We use Eq. 9-5.

(a) The x coordinate of the center of mass is

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2 + m_3 x_3 + m_4 x_4}{m_1 + m_2 + m_3 + m_4} = \frac{0 + (4)(3) + 0 + (12)(-1)}{m_1 + m_2 + m_3 + m_4} = 0.$$

(b) The y coordinate of the center of mass is

$$y_{\text{com}} = \frac{m_1 y_1 + m_2 y_2 + m_3 y_3 + m_4 y_4}{m_1 + m_2 + m_3 + m_4} = \frac{(2)(3) + 0 + (3)(-2) + 0}{m_1 + m_2 + m_3 + m_4} = 0.$$

(c) We now use Eq. 9-17:

$$\begin{aligned} \vec{v}_{\text{com}} &= \frac{m_1 \vec{v}_1 + m_2 \vec{v}_2 + m_3 \vec{v}_3 + m_4 \vec{v}_4}{m_1 + m_2 + m_3 + m_4} \\ &= \frac{(2)(-9\hat{j}) + (4)(6\hat{i}) + (3)(6\hat{j}) + (12)(-2\hat{i})}{m_1 + m_2 + m_3 + m_4} = 0. \end{aligned}$$

92. (a) The change in momentum (taking upwards to be the positive direction) is

$$\Delta \vec{p} = (0.550 \text{ kg})[(3 \text{ m/s})\hat{j} - (-12 \text{ m/s})\hat{j}] = (+8.25 \text{ kg}\cdot\text{m/s})\hat{j}.$$

(b) By the impulse-momentum theorem (Eq. 9-31) $\vec{J} = \Delta \vec{p} = (+8.25 \text{ N}\cdot\text{s})\hat{j}$.

(c) By Newton's third law, $\vec{J}_c = -\vec{J}_b = (-8.25 \text{ N}\cdot\text{s})\hat{j}$.

93. One approach is to choose a *moving* coordinate system which travels the center of mass of the body, and another is to do a little extra algebra analyzing it in the original coordinate system (in which the speed of the $m = 8.0$ kg mass is $v_0 = 2$ m/s, as given). Our solution is in terms of the latter approach since we are assuming that this is the approach most students would take. Conservation of linear momentum (along the direction of motion) requires

$$mv_0 = m_1v_1 + m_2v_2 \Rightarrow (8.0)(2.0) = (4.0)v_1 + (4.0)v_2$$

which leads to $v_2 = 4 - v_1$ in SI units (m/s). We require

$$\Delta K = \left(\frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 \right) - \frac{1}{2}mv_0^2 \Rightarrow 16 = \left(\frac{1}{2}(4.0)v_1^2 + \frac{1}{2}(4.0)v_2^2 \right) - \frac{1}{2}(8.0)(2.0)^2$$

which simplifies to $v_2^2 = 16 - v_1^2$ in SI units. If we substitute for v_2 from above, we find

$$(4 - v_1)^2 = 16 - v_1^2$$

which simplifies to $2v_1^2 - 8v_1 = 0$, and yields either $v_1 = 0$ or $v_1 = 4$ m/s. If $v_1 = 0$ then $v_2 = 4 - v_1 = 4$ m/s, and if $v_1 = 4$ m/s then $v_2 = 0$.

(a) Since the forward part continues to move in the original direction of motion, the speed of the rear part must be zero.

(b) The forward part has a velocity of 4.0 m/s along the original direction of motion.

94. Using Eq. 9-67 and Eq. 9-68, we have after the collision

$$v_1 = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} = \frac{0.6m_1}{1.4m_1} v_{1i} = -\frac{3}{7}(4 \text{ m/s})$$

$$v_2 = \frac{2m_1}{m_1 + m_2} v_{1i} = \frac{2m_1}{1.4m_1} v_{1i} = \frac{1}{7}(4 \text{ m/s}) .$$

(a) During the (subsequent) sliding, the kinetic energy of block 1 $K_{1f} = \frac{1}{2} m_1 v_1^2$ is converted into thermal form ($\Delta E_{\text{th}} = \mu_k m_1 g d_1$). Solving for the sliding distance d_1 we obtain $d_1 = 0.2999 \text{ m} \approx 30 \text{ cm}$.

(b) A very similar computation (but with subscript 2 replacing subscript 1) leads to block 2's sliding distance $d_2 = 3.332 \text{ m} \approx 3.3 \text{ m}$.

95. (a) Noting that the initial velocity of the system is zero, we use Eq. 9-19 and Eq. 2-15 (adapted to two dimensions) to obtain

$$\vec{d} = \frac{1}{2} \left(\frac{\vec{F}_1 + \vec{F}_2}{m_1 + m_2} \right) t^2 = \frac{1}{2} \left(\frac{-2\hat{i} + \hat{j}}{0.006} \right) (0.002)^2$$

which has a magnitude of 0.745 mm.

(b) The angle of \vec{d} is 153° counterclockwise from $+x$ -axis.

(c) A similar calculation using Eq. 2-11 (adapted to two dimensions) leads to a center of mass velocity of $\vec{v} = 0.7453 \text{ m/s}$ at 153° . Thus, the center of mass kinetic energy is

$$K_{\text{com}} = \frac{1}{2} (m_1 + m_2) v^2 = 0.00167 \text{ J}.$$

96. (a) Since the initial momentum is zero, then the final momenta must add (in the vector sense) to 0. Therefore, with SI units understood, we have

$$\begin{aligned}\vec{p}_3 &= -\vec{p}_1 - \vec{p}_2 = -m_1\vec{v}_1 - m_2\vec{v}_2 \\ &= -(16.7 \times 10^{-27}) (6.00 \times 10^6 \hat{i}) - (8.35 \times 10^{-27}) (-8.00 \times 10^6 \hat{j}) \\ &= (-1.00 \times 10^{-19} \hat{i} + 0.67 \times 10^{-19} \hat{j}) \text{ kg} \cdot \text{m/s}.\end{aligned}$$

(b) Dividing by $m_3 = 11.7 \times 10^{-27} \text{ kg}$ and using the Pythagorean theorem we find the speed of the third particle to be $v_3 = 1.03 \times 10^7 \text{ m/s}$. The total amount of kinetic energy is

$$\frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 + \frac{1}{2}m_3v_3^2 = 1.19 \times 10^{-12} \text{ J}.$$

97. Let $M = 22.7$ kg and $m = 3.63$ be the mass of the sled and the cat, respectively. Using the principle of momentum conservation, the speed of the first sled after the cat's first jump with a speed of $v_i = 3.05$ m/s is

$$v_{1f} = \frac{mv_i}{M} = 0.488 \text{ m/s}.$$

On the other hand, as the cat lands on the second sled, it sticks to it and the system (sled plus cat) moves forward with a speed

$$v_{2f} = \frac{mv_i}{M + m} = 0.4205 \text{ m/s}.$$

When the cat makes the second jump back to the first sled with a speed v_i , momentum conservation implies

$$Mv_{2ff} = mv_i + (M + m)v_{2f} = mv_i + mv_i = 2mv_i$$

which yields

$$v_{2ff} = \frac{2mv_i}{M} = 0.975 \text{ m/s}.$$

After the cat lands on the first sled, the entire system (cat and the sled) again moves together. By momentum conservation, we have

$$(M + m)v_{1ff} = mv_i + Mv_{1f} = mv_i + mv_i = 2mv_i$$

or

$$v_{1ff} = \frac{2mv_i}{M + m} = 0.841 \text{ m/s}.$$

(a) From the above, we conclude that the first sled moves with a speed $v_{1ff} = 0.841$ m/s after the cat's two jumps.

(b) Similarly, the speed of the second sled is $v_{2ff} = 0.975$ m/s.

98. We refer to the discussion in the textbook (see Sample Problem 9-8, which uses the same notation that we use here) for many of the important details in the reasoning. Here we only present the primary computational step (using SI units).

(a) The bullet's initial kinetic energy is

$$\frac{1}{2}mv^2 = \frac{1}{2}m \left(\frac{m+M}{m} \sqrt{2gh} \right)^2 = \frac{m+M}{m} U_f$$

where $U_f = (m+M)gh$ is the system's final potential energy (equal to its total mechanical energy since its speed is zero at height h). Thus,

$$\frac{U}{\frac{1}{2}mv^2} = \frac{m}{m+M} = \frac{0.008}{7.008} = 0.00114.$$

(b) The fraction $m/(m+M)$ shown in part (a) has no v -dependence. The answer remains the same.

99. (a) If m is the mass of a pellet and v is its velocity as it hits the wall, then its momentum is $p = mv = (2.0 \times 10^{-3} \text{ kg})(500 \text{ m/s}) = 1.0 \text{ kg} \cdot \text{m/s}$, toward the wall.

(b) The kinetic energy of a pellet is

$$K = \frac{1}{2}mv^2 = \frac{1}{2}(2.0 \times 10^{-3} \text{ kg})(500 \text{ m/s})^2 = 2.5 \times 10^2 \text{ J} .$$

(c) The force on the wall is given by the rate at which momentum is transferred from the pellets to the wall. Since the pellets do not rebound, each pellet that hits transfers $p = 1.0 \text{ kg} \cdot \text{m/s}$. If ΔN pellets hit in time Δt , then the average rate at which momentum is transferred is

$$F_{\text{avg}} = \frac{p\Delta N}{\Delta t} = (1.0 \text{ kg} \cdot \text{m/s})(10 \text{ s}^{-1}) = 10 \text{ N}.$$

The force on the wall is in the direction of the initial velocity of the pellets.

(d) If Δt is the time interval for a pellet to be brought to rest by the wall, then the average force exerted on the wall by a pellet is

$$F_{\text{avg}} = \frac{p}{\Delta t} = \frac{1.0 \text{ kg} \cdot \text{m/s}}{0.6 \times 10^{-3} \text{ s}} = 1.7 \times 10^3 \text{ N}.$$

The force is in the direction of the initial velocity of the pellet.

(e) In part (d) the force is averaged over the time a pellet is in contact with the wall, while in part (c) it is averaged over the time for many pellets to hit the wall. During the majority of this time, no pellet is in contact with the wall, so the average force in part (c) is much less than the average force in part (d).

100. We first consider the 1200 kg part. The impulse has magnitude J and is (by our choice of coordinates) in the positive direction. Let m_1 be the mass of the part and v_1 be its velocity after the bolts are exploded. We assume both parts are at rest before the explosion. Then $J = m_1 v_1$, so

$$v_1 = \frac{J}{m_1} = \frac{300 \text{ N}\cdot\text{s}}{1200 \text{ kg}} = 0.25 \text{ m/s}.$$

The impulse on the 1800 kg part has the same magnitude but is in the opposite direction, so $-J = m_2 v_2$, where m_2 is the mass and v_2 is the velocity of the part. Therefore,

$$v_2 = -\frac{J}{m_2} = -\frac{300 \text{ N}\cdot\text{s}}{1800 \text{ kg}} = -0.167 \text{ m/s}.$$

Consequently, the relative speed of the parts after the explosion is

$$u = 0.25 \text{ m/s} - (-0.167 \text{ m/s}) = 0.417 \text{ m/s}.$$

101. (a) The initial momentum of the car is

$$\vec{p}_i = m\vec{v}_i = (1400\text{ kg})(5.3\text{ m/s})\hat{j} = (7400\text{ kg}\cdot\text{m/s})\hat{j}$$

and the final momentum is $\vec{p}_f = (7400\text{ kg}\cdot\text{m/s})\hat{i}$. The impulse on it equals the change in its momentum: $\vec{J} = \vec{p}_f - \vec{p}_i = (7400\text{ N}\cdot\text{s})(\hat{i} - \hat{j})$.

(b) The initial momentum of the car is $\vec{p}_i = (7400\text{ kg}\cdot\text{m/s})\hat{i}$ and the final momentum is $\vec{p}_f = 0$. The impulse acting on it is $\vec{J} = \vec{p}_f - \vec{p}_i = (-7.4\times 10^3\text{ N}\cdot\text{s})\hat{i}$.

(c) The average force on the car is

$$\vec{F}_{\text{avg}} = \frac{\Delta\vec{p}}{\Delta t} = \frac{\vec{J}}{\Delta t} = \frac{(7400\text{ kg}\cdot\text{m/s})(\hat{i} - \hat{j})}{4.6\text{ s}} = (1600\text{ N})(\hat{i} - \hat{j})$$

and its magnitude is $F_{\text{avg}} = (1600\text{ N})\sqrt{2} = 2.3\times 10^3\text{ N}$.

(d) The average force is

$$\vec{F}_{\text{avg}} = \frac{\vec{J}}{\Delta t} = \frac{(-7400\text{ kg}\cdot\text{m/s})\hat{i}}{350\times 10^{-3}\text{ s}} = (-2.1\times 10^4\text{ N})\hat{i}$$

and its magnitude is $F_{\text{avg}} = 2.1\times 10^4\text{ N}$.

(e) The average force is given above in unit vector notation. Its x and y components have equal magnitudes. The x component is positive and the y component is negative, so the force is 45° below the positive x axis.

102. We locate the coordinate origin at the center of the carbon atom, and we consider both atoms to be “point particles.” We will use the non-SI units for mass found in Appendix F; since they will cancel they will not prevent the answer from being in SI units.

$$r_{\text{com}} = \frac{(15.9994 \text{ grams / mole})(1.131 \times 10^{-10} \text{ m})}{12.01115 \text{ grams / mole} + 15.9994 \text{ grams / mole}} = 6.46 \times 10^{-11} \text{ m}.$$

103. We choose our positive direction in the direction of the rebound (so the ball's initial velocity is negative-valued $\vec{v}_i = -5.2 \text{ m/s}$).

(a) The speed of the ball right after the collision is

$$v_f = \sqrt{\frac{2K_f}{m}} = \sqrt{\frac{2(\frac{1}{2} K_i)}{m}} = \sqrt{\frac{\frac{1}{2} m v_i^2}{m}} = \frac{v_i}{\sqrt{2}} \approx 3.7 \text{ m/s}.$$

(b) With $m = 0.15 \text{ kg}$, the impulse-momentum theorem (Eq. 9-31) yields

$$\vec{J} = m\vec{v}_f - m\vec{v}_i = (0.15)(3.7) - (0.15)(-5.2) = 1.3 \text{ N} \cdot \text{s}.$$

(c) Eq. 9-35 leads to $F_{\text{avg}} = J/\Delta t = 1.3/0.0076 = 1.8 \times 10^2 \text{ N}$.

104. Let m_c be the mass of the Chrysler and v_c be its velocity. Let m_f be the mass of the Ford and v_f be its velocity. Then the velocity of the center of mass is

$$v_{\text{com}} = \frac{m_c v_c + m_f v_f}{m_c + m_f} = \frac{(2400 \text{ kg})(80 \text{ km/h}) + (1600 \text{ kg})(60 \text{ km/h})}{2400 \text{ kg} + 1600 \text{ kg}} = 72 \text{ km/h}.$$

We note that the two velocities are in the same direction, so the two terms in the numerator have the same sign.

105. (a) We take the force to be in the positive direction, at least for earlier times. Then the impulse is

$$\begin{aligned} J &= \int_0^{3.0 \times 10^{-3}} F \, dt = \int_0^{3.0 \times 10^{-3}} (6.0 \times 10^6)t - (2.0 \times 10^9)t^2 \, dt \\ &= \left[\frac{1}{2}(6.0 \times 10^6)t^2 - \frac{1}{3}(2.0 \times 10^9)t^3 \right]_0^{3.0 \times 10^{-3}} \\ &= 9.0 \, \text{N} \cdot \text{s}. \end{aligned}$$

(b) Since $J = F_{\text{avg}} \Delta t$, we find

$$F_{\text{avg}} \frac{J}{\Delta t} = \frac{9.0 \, \text{N} \cdot \text{s}}{3.0 \times 10^{-3} \, \text{s}} = 3.0 \times 10^3 \, \text{N}.$$

(c) To find the time at which the maximum force occurs, we set the derivative of F with respect to time equal to zero – and solve for t . The result is $t = 1.5 \times 10^{-3} \, \text{s}$. At that time the force is

$$F_{\text{max}} = (6.0 \times 10^6)(1.5 \times 10^{-3}) - (2.0 \times 10^9)(1.5 \times 10^{-3})^2 = 4.5 \times 10^3 \, \text{N}.$$

(d) Since it starts from rest, the ball acquires momentum equal to the impulse from the kick. Let m be the mass of the ball and v its speed as it leaves the foot. Then,

$$v = \frac{p}{m} = \frac{J}{m} = \frac{9.0 \, \text{N} \cdot \text{s}}{0.45 \, \text{kg}} = 20 \, \text{m/s}.$$

106. The fact that they are connected by a spring is not used in the solution. We use Eq. 9-17 for \vec{v}_{com} :

$$\begin{aligned} M\vec{v}_{\text{com}} &= m_1\vec{v}_1 + m_2\vec{v}_2 \\ &= (1.0)(1.7) + (3.0)\vec{v}_2 \end{aligned}$$

which yields $|\vec{v}_2| = 0.57 \text{ m/s}$. The direction of \vec{v}_2 is opposite that of \vec{v}_1 (that is, they are both headed towards the center of mass, but from opposite directions).

107. Let m_F be the mass of the freight car and v_F be its initial velocity. Let m_C be the mass of the caboose and v be the common final velocity of the two when they are coupled. Conservation of the total momentum of the two-car system leads to $m_F v_F = (m_F + m_C)v$, so $v = v_F m_F / (m_F + m_C)$. The initial kinetic energy of the system is

$$K_i = \frac{1}{2} m_F v_F^2$$

and the final kinetic energy is

$$K_f = \frac{1}{2} (m_F + m_C) v^2 = \frac{1}{2} (m_F + m_C) \frac{m_F^2 v_F^2}{(m_F + m_C)^2} = \frac{1}{2} \frac{m_F^2 v_F^2}{(m_F + m_C)}.$$

Since 27% of the original kinetic energy is lost, we have $K_f = 0.73 K_i$. Thus,

$$\frac{1}{2} \frac{m_F^2 v_F^2}{(m_F + m_C)} = (0.73) \left(\frac{1}{2} m_F v_F^2 \right).$$

Simplifying, we obtain $m_F / (m_F + m_C) = 0.73$, which we use in solving for the mass of the caboose:

$$m_C = \frac{0.27}{0.73} m_F = 0.37 m_F = (0.37)(3.18 \times 10^4 \text{ kg}) = 1.18 \times 10^4 \text{ kg}.$$

108. No external forces with horizontal components act on the cart-man system and the vertical forces sum to zero, so the total momentum of the system is conserved. Let m_c be the mass of the cart, v be its initial velocity, and v_c be its final velocity (after the man jumps off). Let m_m be the mass of the man. His initial velocity is the same as that of the cart and his final velocity is zero. Conservation of momentum yields $(m_m + m_c)v = m_c v_c$. Consequently, the final speed of the cart is

$$v_c = \frac{v(m_m + m_c)}{m_c} = \frac{(2.3 \text{ m/s})(75 \text{ kg} + 39 \text{ kg})}{39 \text{ kg}} = 6.7 \text{ m/s}.$$

The cart speeds up by $6.7 - 2.3 = +4.4 \text{ m/s}$. In order to slow himself, the man gets the cart to push backward on him by pushing forward on it, so the cart speeds up.

109. (a) Let v be the final velocity of the ball-gun system. Since the total momentum of the system is conserved $mv_i = (m + M)v$. Therefore,

$$v = \frac{mv_i}{m + M} = \frac{(60 \text{ g})(22 \text{ m/s})}{60 \text{ g} + 240 \text{ g}} = 4.4 \text{ m/s}.$$

(b) The initial kinetic energy is $K_i = \frac{1}{2}mv_i^2$ and the final kinetic energy is $K_f = \frac{1}{2}(m + M)v^2 = \frac{1}{2}m^2v_i^2/(m + M)$. The problem indicates $\Delta E_{\text{th}} = 0$, so the difference $K_i - K_f$ must equal the energy U_s stored in the spring:

$$U_s = \frac{1}{2}mv_i^2 - \frac{1}{2}\frac{m^2v_i^2}{(m + M)} = \frac{1}{2}mv_i^2\left(1 - \frac{m}{m + M}\right) = \frac{1}{2}mv_i^2\frac{M}{m + M}.$$

Consequently, the fraction of the initial kinetic energy that becomes stored in the spring is

$$\frac{U_s}{K_i} = \frac{M}{m + M} = \frac{240}{60 + 240} = 0.80.$$

110. (a) We find the momentum \vec{p}_{nr} of the residual nucleus from momentum conservation.

$$\vec{p}_{ni} = \vec{p}_e + \vec{p}_v + \vec{p}_{nr} \Rightarrow 0 = (-1.2 \times 10^{-22})\hat{i} + (-6.4 \times 10^{-23})\hat{j} + \vec{p}_{nr}$$

Thus, $\vec{p}_{nr} = (1.2 \times 10^{-22} \text{ kg} \cdot \text{m/s})\hat{i} + (6.4 \times 10^{-23} \text{ kg} \cdot \text{m/s})\hat{j}$. Its magnitude is

$$|\vec{p}_{nr}| = \sqrt{(1.2 \times 10^{-22})^2 + (6.4 \times 10^{-23})^2} = 1.4 \times 10^{-22} \text{ kg} \cdot \text{m/s}.$$

(b) The angle measured from the $+x$ axis to \vec{p}_{nr} is

$$\theta = \tan^{-1} \left(\frac{6.4 \times 10^{-23}}{1.2 \times 10^{-22}} \right) = 28^\circ.$$

(c) Combining the two equations $p = mv$ and $K = \frac{1}{2}mv^2$, we obtain (with $p = p_{nr}$ and $m = m_{nr}$)

$$K = \frac{p^2}{2m} = \frac{(1.4 \times 10^{-22})^2}{2(5.8 \times 10^{-26})} = 1.6 \times 10^{-19} \text{ J}.$$

111. We use m_1 for the mass of the electron and $m_2 = 1840m_1$ for the mass of the hydrogen atom. Using Eq. 9-68,

$$v_{2f} = \frac{2m_1}{m_1 + 1840m_1} v_{li} = \frac{2}{1841} v_{li}$$

we compute the final kinetic energy of the hydrogen atom:

$$K_{2f} = \frac{1}{2}(1840m_1) \left(\frac{2v_{li}}{1841} \right)^2 = \frac{(1840)(4)}{1841^2} \left(\frac{1}{2}(1840m_1)v_{li}^2 \right)$$

so we find the fraction to be $(1840)(4)/1841^2 \approx 2.2 \times 10^{-3}$, or 0.22%.

112. (a) We use Eq. 9-87. The thrust is

$$Rv_{\text{rel}} = Ma = (4.0 \times 10^4 \text{ kg})(2.0 \text{ m/s}^2) = 8.0 \times 10^4 \text{ N}.$$

(b) Since $v_{\text{rel}} = 3000 \text{ m/s}$, we see from part (a) that $R \approx 27 \text{ kg/s}$.

113. The velocities of m_1 and m_2 just after the collision with each other are given by Eq. 9-75 and Eq. 9-76 (setting $v_{1i} = 0$).

$$v_{1f} = \frac{2m_2}{m_1 + m_2} v_{2i}$$
$$v_{2f} = \frac{m_2 - m_1}{m_1 + m_2} v_{2i}$$

After bouncing off the wall, the velocity of m_2 becomes $-v_{2f}$. In these terms, the problem requires

$$v_{1f} = -v_{2f}$$
$$\frac{2m_2}{m_1 + m_2} v_{2i} = -\frac{m_2 - m_1}{m_1 + m_2} v_{2i}$$

which simplifies to

$$2m_2 = -(m_2 - m_1) \Rightarrow m_2 = \frac{m_1}{3} .$$

With $m_1 = 6.6$ kg, we have $m_2 = 2.2$ kg.

114. We use Eq. 9-88 and simplify with $v_f - v_i = \Delta v$, and $v_{\text{rel}} = u$.

$$v_f - v_i = v_{\text{rel}} \ln \left(\frac{M_i}{M_f} \right) \Rightarrow \frac{M_f}{M_i} = e^{-\Delta v/u}$$

If $\Delta v = 2.2 \text{ m/s}$ and $u = 1000 \text{ m/s}$, we obtain $\frac{M_i - M_f}{M_i} = 1 - e^{-0.0022} \approx 0.0022$.

115. This is a completely inelastic collision (see Eq. 9-53). Thus, the kinetic energy loss is

$$\Delta K = \frac{1}{2}(m_1 + m_2)V^2 - \frac{1}{2}m_1 v_{1i}^2 = \frac{1}{2}(m_1 + m_2)\left(\frac{m_1}{m_1 + m_2}v_{1i}\right)^2 - \frac{1}{2}m_1 v_{1i}^2 = -\frac{1}{2}\frac{m_1 m_2}{m_1 + m_2}v_{1i}^2.$$

Keeping in mind the relation between mass and weight ($m = w/g$), we find the (absolute value) of ΔK is 61.2 kJ.

116. We treat the car (of mass m_1) as a “point-mass” (which is initially 1.5 m from the right end of the boat). The left end of the boat (of mass m_2) is initially at $x = 0$ (where the dock is), and its left end is at $x = 14$ m. The boat’s center of mass (in the absence of the car) is initially at $x = 7.0$ m. We use Eq. 9-5 to calculate the center of mass of the system:

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{(1500 \text{ kg})(14 \text{ m} - 1.5 \text{ m}) + (4000 \text{ kg})(7 \text{ m})}{1500 \text{ kg} + 4000 \text{ kg}} = 8.5 \text{ m}.$$

In the absence of *external* forces, the center of mass of the system does not change. Later, when the car (about to make the jump) is near the left end of the boat (which has moved from the shore an amount δx), the value of the system center of mass is still 8.5 m. The car (at this moment) is thought of as a “point-mass” 1.5 m from the left end, so we must have

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{(1500 \text{ kg})(\delta x + 1.5 \text{ m}) + (4000 \text{ kg})(7 \text{ m} + \delta x)}{1500 \text{ kg} + 4000 \text{ kg}} = 8.5 \text{ m}.$$

Solving this for δx , we find $\delta x = 3.0$ m.

117. This is a completely inelastic collision, but Eq. 9-53 ($V = \frac{m_1}{m_1 + m_2} v_{1i}$) is not easily applied since that equation is designed for use when the struck particle is initially stationary. To deal with this case (where particle 2 is already in motion), we return to the principle of momentum conservation:

$$m_1 \vec{v}_1 + m_2 \vec{v}_2 = (m_1 + m_2) \vec{V} \quad \Rightarrow \quad \vec{V} = \frac{2(4\hat{i}) + 4(2\hat{j})}{2 + 4} .$$

(a) In unit-vector notation, then, \vec{V} is equal to $(1.3 \text{ m/s})\hat{i} + (1.3 \text{ m/s})\hat{j}$.

(b) The magnitude of \vec{V} is $|\vec{V}| = \sqrt{(1.3 \text{ m/s})^2 + (1.3 \text{ m/s})^2} \approx 1.9 \text{ m/s}$.

(c) The direction of \vec{V} is 45° (measured counterclockwise from the $+x$ axis).

118. (a) The initial momentum of the system is zero, and it remains so as the electron and proton move toward each other. If p_e is the magnitude of the electron momentum at some instant (during their motion) and p_p is the magnitude of the proton momentum, then these must be equal (and their directions must be opposite) in order to maintain the zero total momentum requirement. Thus, the ratio of their momentum magnitudes is +1.

(b) With v_e and v_p being their respective speeds, we obtain (from the $p_e = p_p$ requirement)

$$m_e v_e = m_p v_p \Rightarrow v_e / v_p = m_p / m_e \approx 1830 \approx 1.83 \times 10^3.$$

(c) We can rewrite $K = \frac{1}{2} m v^2$ as $K = \frac{1}{2} p^2 / m$ which immediately leads to

$$K_e / K_p = m_p / m_e \approx 1830 \approx 1.83 \times 10^3.$$

(d) Although the speeds (and kinetic energies) increase, they do so in the proportions indicated above. The answers stay the same.

119. (a) The magnitude of the impulse is equal to the change in momentum:

$$J = mv - m(-v) = 2mv = 2(0.140 \text{ kg})(7.80 \text{ m/s}) = 2.18 \text{ kg} \cdot \text{m/s}$$

(b) Since in the calculus sense the average of a function is the integral of it divided by the corresponding interval, then the average force is the impulse divided by the time Δt . Thus, our result for the magnitude of the average force is $2mv/\Delta t$. With the given values, we obtain

$$F_{\text{avg}} = \frac{2(0.140 \text{ kg})(7.80 \text{ m/s})}{0.00380 \text{ s}} = 575 \text{ N} .$$

120. (a) Using Eq. 9-18, we have

$$\vec{a}_{\text{com}} = \frac{m_1 \vec{a}_1 + m_2 \vec{a}_2}{m_1 + m_2} = \frac{0 + m(-9.8 \hat{j})}{2m} = (-4.9 \text{ m/s}^2) \hat{j}.$$

(b) Now we have

$$\vec{a}_{\text{com}} = \frac{m_1 \vec{a}_1 + m_2 \vec{a}_2}{m_1 + m_2} = \frac{m(-9.8 \hat{j}) + m(-9.8 \hat{j})}{2m} = (-9.8 \text{ m/s}^2) \hat{j}$$

for (most of) this second time interval. We note that there is an “undefined” acceleration at the instant when the first coin hits (at $t = 1.498 \approx 1.5$ s).

(c) Except for the moment when the second coin hits, the answer is the same as in part (a), $\vec{a}_{\text{com}} = (-4.9 \text{ m/s}^2) \hat{j}$, since one of them is in free fall while the other is at rest. As noted in part (b), we are not given enough information to quantitatively describe the acceleration value at the instant when the second coin strikes the ground. Qualitatively, we can describe it as a large and very brief acceleration (a “spike”) in the $+\hat{j}$ direction at $t = 1.998 \approx 2$ s.

(d) Eq. 2-11 readily yields the center of mass velocity at $t = 0.25$ s (which is in the first time interval – see part (a)): $\vec{v}_{\text{com}} = (-4.9 \hat{j})(0.25) = (-1.225 \text{ m/s}) \hat{j}$. The center of mass speed at that moment is therefore approximately 1.23 m/s.

(e) Because of the “spikes” referred to above, it is probably a better approach to find the individual velocities at $t = 0.75$ s and then use Eq. 9-17 to obtain \vec{v}_{com} . At this moment, both coins are in free-fall, with speeds $v_1 = (9.8)(0.75) = 7.35$ m/s and $v_2 = (9.8)(0.25) = 2.45$ m/s (because the second coin has been in free fall for only 0.25 second). The average of these two speeds (which is the same as what results from Eq. 9-17 for equal-mass objects) is 4.90 m/s.

(f) At $t = 1.75$ s, the first coin is at rest on the ground (and thus has $v_1 = 0$) whereas the second coin is still in free fall and has speed given by $v_2 = (9.8)(1.25) = 12.3$ m/s (because the second coin has been in free fall for 1.25 second). Now the average of these leads to a center of mass speed approximately equal to 6.13 m/s.

121. Using Eq. 9-68 with $m_1 = 3.0$ kg, $v_{1i} = 8.0$ m/s and $v_{2f} = 6.0$ m/s, then

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} \Rightarrow m_2 = m_1 \left(\frac{2v_{1i}}{v_{2f}} - 1 \right)$$

leads to $m_2 = M = 5.0$ kg.

122. Conservation of momentum leads to

$$(900 \text{ kg})(1000 \text{ m/s}) = (500 \text{ kg})(v_{\text{shuttle}} - 100 \text{ m/s}) + (400 \text{ kg})(v_{\text{shuttle}})$$

which yields $v_{\text{shuttle}} = 1055.6 \text{ m/s}$ for the shuttle speed and $v_{\text{shuttle}} - 100 \text{ m/s} = 955.6 \text{ m/s}$ for the module speed (all measured in the frame of reference of the stationary main spaceship). The fractional increase in the kinetic energy is

$$\frac{\Delta K}{K_i} = \frac{K_f}{K_i} - 1 = \frac{\frac{500 \text{ kg}}{2}(955.6 \text{ m/s})^2 + \frac{400 \text{ kg}}{2}(1055.6 \text{ m/s})^2}{\frac{900 \text{ kg}}{2}(1000 \text{ m/s})^2} = 2.5 \times 10^{-3}.$$

123. Let $m = 6.00$ kg be the mass of the original model rocket which travels with an initial velocity $\vec{v}_i = -(20.0 \text{ m/s})\hat{j}$. The two pieces it breaks up into have masses $m_1=2.00$ kg and $m_2=4.00$ kg, with \vec{v}_1 being the velocity of m_1 . Using the principle of momentum conservation, we have $m\vec{v}_i = m_1\vec{v}_1 + m_2\vec{v}_2$.

(a) The momentum of the second piece is (SI units understood)

$$\begin{aligned}\vec{p}_2 &= m_2\vec{v}_2 = m\vec{v}_i - m_1\vec{v}_1 = (6.00)(-20.0\hat{j}) - (2.00)(-12.0\hat{i} + 30.0\hat{j} - 15.0\hat{k}) \\ &= 24.0\hat{i} - 180\hat{j} + 30.0\hat{k}.\end{aligned}$$

(b) With $\vec{v}_2 = (24.0\hat{i} - 180\hat{j} + 30.0\hat{k})/4 = 6.00\hat{i} - 45.0\hat{j} + 7.50\hat{k}$ (in m/s), the kinetic energy of m_2 is given by

$$K_2 = \frac{1}{2}m_2v_2^2 = \frac{1}{2}m_2(v_{2x}^2 + v_{2y}^2 + v_{2z}^2) = \frac{1}{2}(4.00)[(6.00)^2 + (-45.0)^2 + (7.50)^2] = 4.23 \times 10^3 \text{ J}.$$

(c) The initial kinetic energy is

$$K_i = \frac{1}{2}mv_i^2 = \frac{1}{2}(6.00)(20.0)^2 = 1.20 \times 10^3 \text{ J}.$$

The kinetic energy of m_1 is

$$\begin{aligned}K_1 &= \frac{1}{2}m_1v_1^2 = \frac{1}{2}m_1(v_{1x}^2 + v_{1y}^2 + v_{1z}^2) \\ &= \frac{1}{2}(2.00)[(-12.0)^2 + (30.0)^2 + (-15.0)^2] = 1269 \text{ J} \approx 1.27 \times 10^3 \text{ J}\end{aligned}$$

Thus, the change in kinetic energy is

$$\Delta K = K_1 + K_2 - K_i = (1.27 + 4.23 - 1.20) \times 10^3 \text{ J} = 4.30 \times 10^3 \text{ J}$$

124. The momentum before the collision (with $+x$ rightward) is

$$(6.0 \text{ kg})(8.0 \text{ m/s}) + (4.0 \text{ kg})(2.0 \text{ m/s}) = 56 \text{ kg} \cdot \text{m/s}.$$

(a) The total momentum at this instant is $(6.0 \text{ kg})(6.4 \text{ m/s}) + (4.0 \text{ kg})\vec{v}$. Since this must equal the initial total momentum (56, using SI units), then we find $\vec{v} = 4.4 \text{ m/s}$.

(b) The initial kinetic energy was

$$\frac{1}{2}(6.0 \text{ kg})(8.0 \text{ m/s})^2 + \frac{1}{2}(4.0 \text{ kg})(2.0 \text{ m/s})^2 = 200 \text{ J}.$$

The kinetic energy at the instant described in part (a) is

$$\frac{1}{2}(6.0 \text{ kg})(6.4 \text{ m/s})^2 + \frac{1}{2}(4.0 \text{ kg})(4.4 \text{ m/s})^2 = 162 \text{ J}.$$

The “missing” 38 J is not dissipated since there is no friction; it is the energy stored in the spring at this instant when it is compressed. Thus, $U_e = 38 \text{ J}$.

125. By conservation of momentum, the final speed v of the sled satisfies

$$(2900 \text{ kg})(250 \text{ m/s}) = (2900 \text{ kg} + 920 \text{ kg})v$$

which gives $v = 190 \text{ m/s}$.

126. This is a completely inelastic collision, followed by projectile motion. In the collision, we use momentum conservation.

$$\vec{p}_{\text{shoes}} = \vec{p}_{\text{together}} \Rightarrow (3.2 \text{ kg})(3.0 \text{ m/s}) = (5.2 \text{ kg})\vec{v}$$

Therefore, $\vec{v} = 1.8 \text{ m/s}$ toward the right as the combined system is projected from the edge of the table. Next, we can use the projectile motion material from Ch. 4 or the energy techniques of Ch. 8; we choose the latter.

$$K_{\text{edge}} + U_{\text{edge}} = K_{\text{floor}} + U_{\text{floor}}$$
$$\frac{1}{2}(5.2 \text{ kg})(1.8 \text{ m/s})^2 + (5.2 \text{ kg})(9.8 \text{ m/s}^2)(0.40 \text{ m}) = K_{\text{floor}} + 0$$

Therefore, the kinetic energy of the system right before hitting the floor is $K_{\text{floor}} = 29 \text{ J}$.

127. We denote the mass of the car as M and that of the sumo wrestler as m . Let the initial velocity of the sumo wrestler be $v_0 > 0$ and the final velocity of the car be v . We apply the momentum conservation law.

(a) From $mv_0 = (M + m)v$ we get

$$v = \frac{mv_0}{M + m} = \frac{(242 \text{ kg})(5.3 \text{ m/s})}{2140 \text{ kg} + 242 \text{ kg}} = 0.54 \text{ m/s}.$$

(b) Since $v_{\text{rel}} = v_0$, we have $mv_0 = Mv + m(v + v_{\text{rel}}) = mv_0 + (M + m)v$, and obtain $v = 0$ for the final speed of the flatcar.

(c) Now $mv_0 = Mv + m(v - v_{\text{rel}})$, which leads to

$$v = \frac{m(v_0 + v_{\text{rel}})}{m + M} = \frac{(242 \text{ kg})(5.3 \text{ m/s} + 5.3 \text{ m/s})}{242 \text{ kg} + 2140 \text{ kg}} = 1.1 \text{ m/s}.$$

128. (a) Since $\vec{F}_{\text{net}} = d\vec{p}/dt$, we read from value of F_x (see graph) that the rate of change of momentum is $4.0 \text{ kg} \cdot \text{m/s}^2$ at $t = 3.0 \text{ s}$.

(b) The impulse, which causes the change in momentum, is equivalent to the area under the curve in this graph (see Eq. 9-30). We break the area into that of a triangle $\frac{1}{2}(2.0 \text{ s})(4.0 \text{ N})$ plus that of a rectangle $(1.0 \text{ s})(4.0 \text{ N})$, which yields a total of $8.0 \text{ N} \cdot \text{s}$. Since the car started from rest, its momentum at $t = 3.0 \text{ s}$ must therefore be $8.0 \text{ kg} \cdot \text{m/s}$.

129. From mechanical energy conservation (or simply using Eq. 2-16 with $\vec{a} = g$ downward) we obtain

$$v = \sqrt{2gh} = \sqrt{2(9.8)(1.5)} = 5.4 \text{ m/s}$$

for the speed just as the body makes contact with the ground.

(a) During the compression of the body, the center of mass must decelerate over a distance $d = 0.30 \text{ m}$. Choosing $+y$ downward, the deceleration a is found using Eq. 2-16.

$$0 = v^2 + 2ad \Rightarrow a = -\frac{v^2}{2d} = -\frac{5.4^2}{2(0.30)}$$

which yields $a = -49 \text{ m/s}^2$. Thus, the magnitude of the net (vertical) force is $m|a| = 49m$ in SI units, which (since $49 = 5(9.8)$) can be expressed as $5mg$.


(b) During the deceleration process, the forces on the dinosaur are (in the vertical direction) \vec{F}_N and $m\vec{g}$. If we choose $+y$ upward, and use the final result from part (a), we therefore have $F_N - mg = 5mg$, or $F_N = 6mg$. In the horizontal direction, there is also a deceleration (from $v_0 = 19 \text{ m/s}$ to zero), in this case due to kinetic friction $f_k = \mu_k F_N = \mu_k (6mg)$. Thus, the net force exerted by the ground on the dinosaur is

$$F_{\text{ground}} = \sqrt{f_k^2 + F_N^2} \approx 7mg.$$

(c) We can apply Newton's second law in the horizontal direction (with the sliding distance denoted as Δx) and then use Eq. 2-16, or we can apply the general notions of energy conservation. The latter approach is shown:

$$\frac{1}{2}mv_o^2 = \mu_k(6mg)\Delta x \Rightarrow \Delta x = \frac{19^2}{2(6)(0.6)(9.8)} \approx 5 \text{ m}.$$

130. The diagram below shows the situation as the incident ball (the left-most ball) makes contact with the other two.



It exerts an impulse of the same magnitude on each ball, along the line that joins the centers of the incident ball and the target ball. The target balls leave the collision along those lines, while the incident ball leaves the collision along the x axis. The three dotted lines that join the centers of the balls in contact form an equilateral triangle, so both of the angles marked θ are 30° . Let v_0 be the velocity of the incident ball before the collision and V be its velocity afterward. The two target balls leave the collision with the same speed. Let v represent that speed. Each ball has mass m . Since the x component of the total momentum of the three-ball system is conserved,

$$mv_0 = mV + 2mv \cos \theta$$

and since the total kinetic energy is conserved,

$$\frac{1}{2}mv_0^2 = \frac{1}{2}mV^2 + 2\left(\frac{1}{2}mv^2\right).$$

We know the directions in which the target balls leave the collision so we first eliminate V and solve for v . The momentum equation gives $V = v_0 - 2v \cos \theta$, so

$$V^2 = v_0^2 - 4v_0v \cos \theta + 4v^2 \cos^2 \theta$$

and the energy equation becomes $v_0^2 = v_0^2 - 4v_0v \cos \theta + 4v^2 \cos^2 \theta + 2v^2$. Therefore,

$$v = \frac{2v_0 \cos \theta}{1 + 2 \cos^2 \theta} = \frac{2(10 \text{ m/s}) \cos 30^\circ}{1 + 2 \cos^2 30^\circ} = 6.93 \text{ m/s}.$$

(a) The discussion and computation above determines the final speed of ball 2 (as labeled in Fig. 9-83) to be 6.9 m/s.

(b) The direction of ball 2 is at 30° counterclockwise from the $+x$ axis.

(c) Similarly, the final speed of ball 3 is 6.9 m/s.

(d) The direction of ball 3 is at -30° counterclockwise from the $+x$ axis.

(e) Now we use the momentum equation to find the final velocity of ball 1:

$$V = v_0 - 2v \cos \theta = 10 \text{ m/s} - 2(6.93 \text{ m/s}) \cos 30^\circ = -2.0 \text{ m/s}.$$

So the speed of ball 1 is $|V| = 2.0 \text{ m/s}$.

(f) The minus sign indicates that it bounces back in the $-x$ direction. The angle is -180° .

131. The mass of each ball is m , and the initial speed of one of the balls is $v_{1i} = 2.2 \text{ m/s}$. We apply the conservation of linear momentum to the x and y axes respectively.

$$\begin{aligned}mv_{1i} &= mv_{1f} \cos \theta_1 + mv_{2f} \cos \theta_2 \\ 0 &= mv_{1f} \sin \theta_1 - mv_{2f} \sin \theta_2\end{aligned}$$

The mass m cancels out of these equations, and we are left with two unknowns and two equations, which is sufficient to solve.

(a) The y -momentum equation can be rewritten as, using $\theta_2 = 60^\circ$ and $v_{2f} = 1.1 \text{ m/s}$,

$$v_{1f} \sin \theta_1 = (1.1 \text{ m/s}) \sin 60^\circ = 0.95 \text{ m/s}.$$

and the x -momentum equation yields

$$v_{1f} \cos \theta_1 = (2.2 \text{ m/s}) - (1.1 \text{ m/s}) \cos 60^\circ = 1.65 \text{ m/s}.$$

Dividing these two equations, we find $\tan \theta_1 = 0.576$ which yields $\theta_1 = 30^\circ$. We plug the value into either equation and find $v_{1f} \approx 1.9 \text{ m/s}$.

(b) From the above, we have $\theta_1 = 30^\circ$.

(c) One can check to see if this an elastic collision by computing

$$\frac{2K_i}{m} = v_{1i}^2 \quad \text{and} \quad \frac{2K_f}{m} = v_{1f}^2 + v_{2f}^2$$

and seeing if they are equal (they are), but one must be careful not to use rounded-off values. Thus, it is useful to note that the answer in part (a) can be expressed “exactly” as $v_{1f} = \frac{1}{2} v_{1i} \sqrt{3}$ (and of course $v_{2f} = \frac{1}{2} v_{1i}$ “exactly” — which makes it clear that these two kinetic energy expressions are indeed equal).

132. (a) We use Fig. 9-22 of the text (which treats both angles as positive-valued, even though one of them is in the fourth quadrant; this is why there is an explicit minus sign in Eq. 9-80 as opposed to it being implicitly in the angle). We take the cue ball to be body 1 and the other ball to be body 2. Conservation of the x and the components of the total momentum of the two-ball system leads to:

$$mv_{1i} = mv_{1f} \cos \theta_1 + mv_{2f} \cos \theta_2$$

$$0 = -mv_{1f} \sin \theta_1 + mv_{2f} \sin \theta_2.$$

The masses are the same and cancel from the equations. We solve the second equation for $\sin \theta_2$:

$$\sin \theta_2 = \frac{v_{1f}}{v_{2f}} \sin \theta_1 = \left(\frac{3.50 \text{ m/s}}{2.00 \text{ m/s}} \right) \sin 22.0^\circ = 0.656 .$$

Consequently, the angle between the second ball and the initial direction of the first is $\theta_2 = 41.0^\circ$.

(b) We solve the first momentum conservation equation for the initial speed of the cue ball.

$$v_{1i} = v_{1f} \cos \theta_1 + v_{2f} \cos \theta_2 = (3.50 \text{ m/s}) \cos 22.0^\circ + (2.00 \text{ m/s}) \cos 41.0^\circ = 4.75 \text{ m/s} .$$

(c) With SI units understood, the initial kinetic energy is

$$K_i = \frac{1}{2}mv_i^2 = \frac{1}{2}m(4.75)^2 = 11.3m$$

and the final kinetic energy is

$$K_f = \frac{1}{2}mv_{1f}^2 + \frac{1}{2}mv_{2f}^2 = \frac{1}{2}m((3.50)^2 + (2.00)^2) = 8.1m.$$

Kinetic energy is not conserved.

133. (a) We locate the coordinate origin at the center of Earth. Then the distance r_{com} of the center of mass of the Earth-Moon system is given by

$$r_{\text{com}} = \frac{m_M r_M}{m_M + m_E}$$

where m_M is the mass of the Moon, m_E is the mass of Earth, and r_M is their separation. These values are given in Appendix C. The numerical result is

$$r_{\text{com}} = \frac{(7.36 \times 10^{22} \text{ kg})(3.82 \times 10^8 \text{ m})}{7.36 \times 10^{22} \text{ kg} + 5.98 \times 10^{24} \text{ kg}} = 4.64 \times 10^6 \text{ m} \approx 4.6 \times 10^3 \text{ km}.$$

(b) The radius of Earth is $R_E = 6.37 \times 10^6 \text{ m}$, so $r_{\text{com}} / R_E = 0.73 = 73\%$.

134. (a) Each block is assumed to have uniform density, so that the center of mass of each block is at its geometric center (the positions of which are given in the table [see problem statement] at $t = 0$). Plugging these positions (and the block masses) into Eq. 9-29 readily gives $x_{\text{com}} = -0.50 \text{ m}$ (at $t = 0$).

(b) Note that the left edge of block 2 (the middle of which is still at $x = 0$) is at $x = -2.5 \text{ cm}$, so that at the moment they touch the right edge of block 1 is at $x = -2.5 \text{ cm}$ and thus the middle of block 1 is at $x = -5.5 \text{ cm}$. Putting these positions (for the middles) and the block masses into Eq. 9-29 leads to $x_{\text{com}} = -1.83 \text{ cm}$ or -0.018 m (at $t = (1.445 \text{ m})/(0.75 \text{ m/s}) = 1.93 \text{ s}$).

(c) We could figure where the blocks are at $t = 4.0 \text{ s}$ and use Eq. 9-29 again, but it is easier (and provides more insight) to note that in the absence of *external* forces on the system the center of mass should move at constant velocity:

$$\vec{v}_{\text{com}} = \frac{m_1 \vec{v}_1 + m_2 \vec{v}_2}{m_1 + m_2} = 0.25 \text{ m/s } \hat{i}$$

as can be easily verified by putting in the values at $t = 0$. Thus,

$$x_{\text{com}} = x_{\text{com initial}} + \vec{v}_{\text{com}} t = (-0.50 \text{ m}) + (0.25 \text{ m/s})(4.0 \text{ s}) = +0.50 \text{ m} .$$

135. (a) The thrust is Rv_{rel} where $v_{\text{rel}} = 1200$ m/s. For this to equal the weight Mg where $M = 6100$ kg, we must have $R = (6100)(9.8)/1200 \approx 50$ kg/s.

(b) Using Eq. 9-42 with the additional effect due to gravity, we have

$$Rv_{\text{rel}} - Mg = Ma$$

so that requiring $a = 21$ m/s² leads to $R = (6100)(9.8 + 21)/1200 = 1.6 \times 10^2$ kg/s.

136. From mechanical energy conservation (or simply using Eq. 2-16 with $\vec{a} = g$ downward) we obtain $v = \sqrt{2gh} = \sqrt{2(9.8)(6.0)} = 10.8 \text{ m/s}$ for the speed just as the $m = 3000\text{-kg}$ block makes contact with the pile. At the moment of “joining,” they are a system of mass $M = 3500 \text{ kg}$ and speed V . With downward positive, momentum conservation leads to

$$mv = MV \Rightarrow V = \frac{(3000)(10.8)}{3500} = 9.3 \text{ m/s}.$$

Now this block-pile “object” must be rapidly decelerated over the small distance $d = 0.030 \text{ m}$. Using Eq. 2-16 and choosing +y downward, we have

$$0 = V^2 + 2ad \Rightarrow a = -\frac{9.3^2}{2(0.030)} = -1440$$

in SI units (m/s^2). Thus, the net force during the decelerating process has magnitude

$$M|a| = 5.0 \times 10^6 \text{ N}.$$

137. In the momentum relationships, we could as easily work with weights as with masses, but because part (b) of this problem asks for kinetic energy—we will find the masses at the outset: $m_1 = 280 \times 10^3 / 9.8 = 2.86 \times 10^4$ kg and $m_2 = 210 \times 10^3 / 9.8 = 2.14 \times 10^4$ kg. Both cars are moving in the $+x$ direction: $v_{1i} = 1.52$ m/s and $v_{2i} = 0.914$ m/s.

(a) If the collision is completely elastic, momentum conservation leads to a final speed of

$$V = \frac{m_1 v_{1i} + m_2 v_{2i}}{m_1 + m_2} = 1.26 \text{ m/s}.$$

(b) We compute the total initial kinetic energy and subtract from it the final kinetic energy.

$$K_i - K_f = \frac{1}{2} m_1 v_{1i}^2 + \frac{1}{2} m_2 v_{2i}^2 - \frac{1}{2} (m_1 + m_2) V^2 = 2.25 \times 10^3 \text{ J}.$$

(c) Using Eq. 9-76, we find

$$v_{2f} = \frac{2m_1}{m_1 + m_2} v_{1i} + \frac{m_2 - m_1}{m_1 + m_2} v_{2i} = 1.61 \text{ m/s}$$

(d) Using Eq. 9-75, we find

$$v_{1f} = \frac{m_1 - m_2}{m_1 + m_2} v_{1i} + \frac{2m_2}{m_1 + m_2} v_{2i} = 1.00 \text{ m/s}.$$

138. (a) The center of mass does not move in the absence of external forces (since it was initially at rest).

(b) They collide at their center of mass. If the initial coordinate of P is $x = 0$ and the initial coordinate of Q is $x = 1.0$ m, then Eq. 9-5 gives

$$x_{\text{com}} = \frac{m_1 x_1 + m_2 x_2}{m_1 + m_2} = \frac{0 + (0.30 \text{ kg})(1.0 \text{ m})}{0.1 \text{ kg} + 0.3 \text{ kg}} = 0.75 \text{ m}.$$

Thus, they collide at a point 0.75 m from P 's original position.

139. We choose coordinates with $+x$ East and $+y$ North, with the standard conventions for measuring the angles. With SI units understood, we write the initial magnitude of the man's momentum as $(60)(6.0) = 360$ and the final momentum of the two of them together as $(98)(3.0) = 294$. Using magnitude-angle notation (quickly implemented using a vector-capable calculator in polar mode), momentum conservation becomes

$$\vec{p}_{\text{man}} + \vec{p}_{\text{child}} = \vec{p}_{\text{together}} \Rightarrow (360 \angle 90^\circ) + \vec{p} = (294 \angle 35^\circ)$$

Therefore, the momentum of the 38 kg child before the collision is $\vec{p} = (308 \angle -38^\circ)$.

(a) Thus, the child's velocity has magnitude equal to $308/38 = 8.1$ m/s.

(b) The direction of the child's velocity is 38° south of east.

140. We use coordinates with +x eastward and +y northward. Angles are in degrees and are measured counterclockwise from the +x axis. Mass, velocity and momentum units are SI. Thus, the initial momentum can be written $\vec{p}_0 = (0.20)(10\hat{i}) = 2.0\hat{i}$ or in magnitude-angle notation as $(2.0 \angle 0)$.

(a) The momentum change is

$$4.0\hat{i} - 2.0\hat{i} = 2.0\hat{i}, \text{ or } (4.0 \angle 0) - (2.0 \angle 0) = (2.0 \angle 0)$$

(efficiently done with a vector capable calculator in polar mode). With either notation, we see the magnitude of the change is 2.0 kg·m/s and its direction is east.

(b) The momentum change is

$$1.0\hat{i} - 2.0\hat{i} = -1.0\hat{i}, \text{ or } (1.0 \angle 0) - (2.0 \angle 0) = (1.0 \angle 180).$$

The magnitude of the change is 1.0 kg·m/s and its direction is west.

(c) The momentum change is

$$-2.0\hat{i} - 2.0\hat{i} = -4.0\hat{i}, \text{ or } (2.0 \angle 180) - (2.0 \angle 0) = (4.0 \angle 180)$$

(efficiently done with a vector capable calculator in polar mode). Thus, the magnitude of the change is 4.0 kg·m/s; the direction of the change is west.